
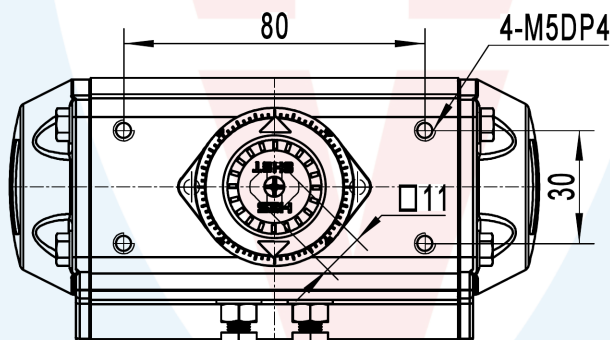
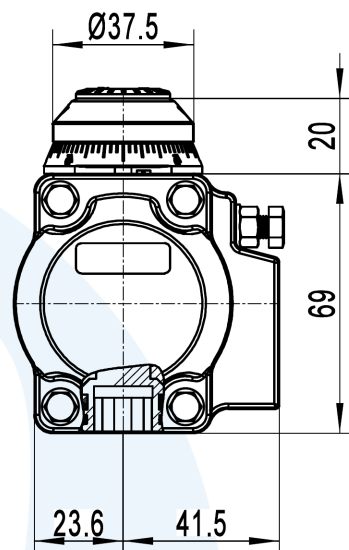


11  $+0.027$   
0

4-M5-DP8-Ø42

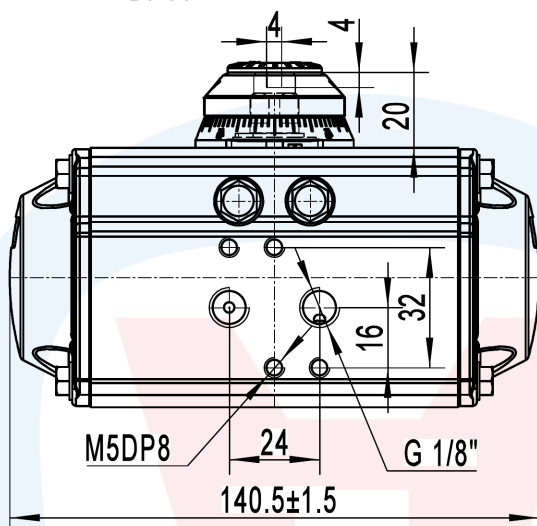

| 执行器型号   | 2.5bar | 3.0bar | 3.5bar | 4.0bar | 4.5bar | 5.0bar | 5.5bar | 6.0bar | 7.0bar | 8.0bar |
|---------|--------|--------|--------|--------|--------|--------|--------|--------|--------|--------|
| DR00015 | 8.3    | 10.0   | 11.6   | 13.3   | 15.0   | 16.6   | 18.3   | 19.9   | 23.3   | 26.6   |

| 执行器型号       | 弹簧数量   | 空气压力扭矩      |                                                      |                |           |          |                |                |                |          |           |          |           |          |           |          |           |          |           |          |           | 弹簧复位 扭矩   |          |
|-------------|--------|-------------|------------------------------------------------------|----------------|-----------|----------|----------------|----------------|----------------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|----------|-----------|-----------|----------|
|             |        | 2.5bar      |                                                      | 3.0bar         |           | 3.5bar   |                | 4.0bar         |                | 4.5bar   |           | 5.0bar   |           | 5.5bar   |           | 6.0bar   |           | 7.0bar   |           | 8.0bar   |           |           |          |
|             |        | 0°<br>开始    | 90°<br>结束                                            | 0°<br>开始       | 90°<br>结束 | 0°<br>开始 | 90°<br>结束      | 0°<br>开始       | 90°<br>结束      | 0°<br>开始 | 90°<br>结束 | 0°<br>开始 | 90°<br>结束 | 0°<br>开始 | 90°<br>结束 | 0°<br>开始 | 90°<br>结束 | 0°<br>开始 | 90°<br>结束 | 0°<br>开始 | 90°<br>结束 | 90°<br>开始 | 0°<br>结束 |
| SC00015     | 05     | 4.9         | 3.4                                                  | 6.6            | 5.1       | 8.2      | 6.8            | 9.9            | 8.4            | 11.6     | 10.1      | 13.2     | 11.7      |          |           |          |           |          |           |          |           | 4.9       | 3.4      |
|             | 06     | 4.2         | 2.5                                                  | 5.9            | 4.1       | 7.6      | 5.8            | 9.2            | 7.4            | 10.9     | 9.1       | 12.5     | 10.8      | 14.2     | 12.4      |          |           |          |           |          |           | 5.8       | 4.1      |
|             | 07     |             |                                                      | 5.2            | 3.2       | 6.9      | 4.8            | 8.5            | 6.5            | 10.2     | 8.1       | 11.9     | 9.8       | 13.5     | 11.5      | 15.2     | 13.1      |          |           |          |           | 6.8       | 5.7      |
|             | 08     |             |                                                      |                |           | 6.2      | 3.8            | 7.9            | 5.5            | 9.5      | 7.2       | 11.2     | 8.8       | 12.8     | 10.5      | 14.5     | 12.1      | 17.8     | 15.5      |          |           | 7.8       | 5.4      |
|             | 09     |             |                                                      |                |           |          |                | 7.2            | 4.5            | 8.9      | 6.2       | 10.5     | 7.8       | 12.2     | 9.5       | 13.8     | 11.2      | 17.2     | 14.5      | 20.5     | 17.8      | 8.8       | 6.1      |
|             | 10     |             |                                                      |                |           |          |                |                |                | 8.2      | 5.2       | 9.8      | 6.9       | 11.5     | 8.5       | 13.2     | 10.2      | 16.5     | 13.5      | 19.8     | 16.8      | 9.7       | 6.8      |
|             | 11     |             |                                                      |                |           |          |                |                |                |          |           | 9.2      | 5.9       | 10.8     | 7.6       | 12.5     | 9.2       | 15.8     | 12.5      | 19.1     | 15.9      | 10.7      | 7.4      |
|             | 12     |             |                                                      |                |           |          |                |                |                |          |           |          |           | 10.1     | 6.6       | 11.8     | 8.2       | 15.1     | 11.6      | 18.4     | 14.9      | 11.7      | 8.1      |
| 型号          | 最大气源压力 | 旋转角度        | 操作温度 (°C)                                            | 气缸直径<br>Ø (mm) | 气缸容量 (L)  |          | 开关时间 (S)       |                | 重量 (kg)        |          |           |          |           |          |           |          |           |          |           |          |           |           |          |
|             |        |             |                                                      |                | 开向        | 关向       | 开向             | 关向             |                |          |           |          |           |          |           |          |           |          |           |          |           |           |          |
| DRSC00015-K | 8bar   | 0°-90°(±5°) | ST (-20 to +80)<br>HT (-15 to+150)<br>LT (-40 to+80) | 50             | 0.1       | 0.2      | DR0.2<br>SC0.3 | DR0.3<br>SC0.3 | DR 1<br>SC 1.2 |          |           |          |           |          |           |          |           |          |           |          |           |           |          |