
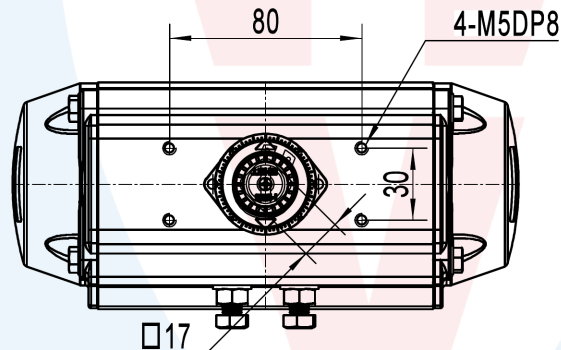
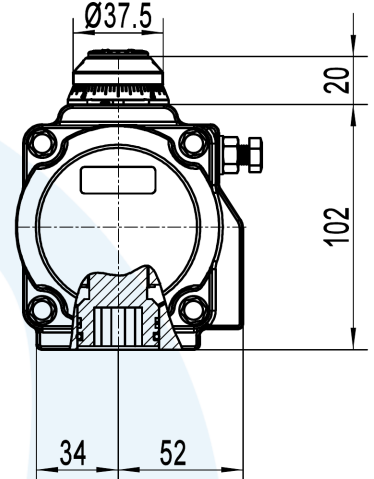
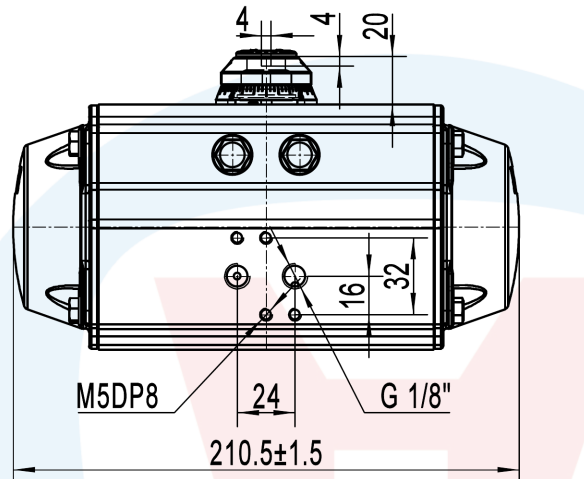


DRSC00060-K

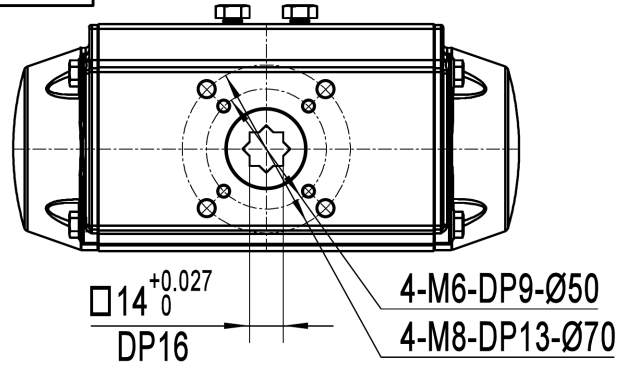

output torque (NM)

Model	2.5bar	3.0bar	3.5bar	4.0bar	4.5bar	5.0bar	5.5bar	6.0bar	7.0bar	8.0bar
DR00060-K	29.1	34.9	40.7	46.5	52.3	58.2	64.0	69.8	81.4	93.0

output torque (NM)

Model	Number of springs	Air pressure torque																				Spring return torque	
		2.5bar		3.0bar		3.5bar		4.0bar		4.5bar		5.0bar		5.5bar		6.0bar		7.0bar		8.0bar			
		0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°	0°	90°		
		Start	End	Start	End	Start	End	Start	End	Start	End	Start	End	Start	End	Start	End	Start	End	Start	End		
SC00060-K	05	18	11.7	23.8	17.6	29.6	23.4	35.4	29.2	41.2	35	47.1	40.8									17.3	11.1
	06	15.8	8.3	21.6	14.1	27.4	19.9	33.2	25.7	39	31.5	44.8	37.3	50.7	43.2							20.8	13.3
	07			19.4	10.6	25.2	16.4	31	22.3	36.8	28.1	42.6	33.9	48.4	39.7	54.3	45.5					24.2	15.5
	08					23	13	28.8	18.8	34.6	24.6	40.4	30.4	46.2	36.2	52	42	63.7	53.7			27.7	17.7
	09							26.6	15.3	32.4	21.1	38.2	27	44	32.8	49.8	38.6	61.5	50.2	73.1	61.8	31.1	19.9
	10									30.2	17.7	36	23.5	41.8	29.3	47.6	35.1	59.2	46.7	70.9	58.4	34.6	22.1
	11											33.8	20	39.6	25.8	45.4	31.7	57	43.3	68.7	54.9	38.1	24.3
	12													37.4	22.4	43.2	28.2	54.8	39.8	66.4	51.4	41.5	26.5

Sign

Model

Maximum pressure

Rotation Angle

Temperature (°C)

cylinder bore
Ø (mm)

Cylinder capacity (L)

Switch time (S)

Weight (kg)

Date

Inner side

Outer side

open

close

each

DRSC00060-K

8bar

0°-90° (±5°)

ST- (20to+80)
HT- (15to+150)
LT- (40to+80)

75

0.3

0.5

DR0.3
SC0.4DR0.4
SC0.5DR 3.3
SC 3.7