



AW13

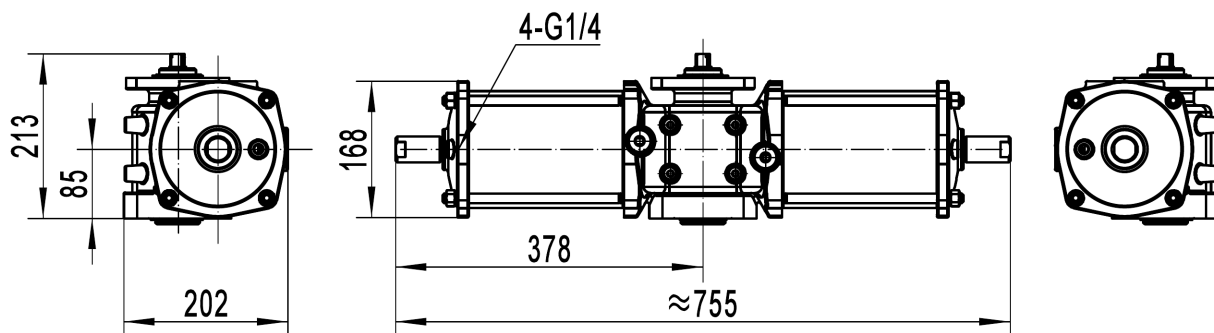


Connection Size


Connection size of bottom valve

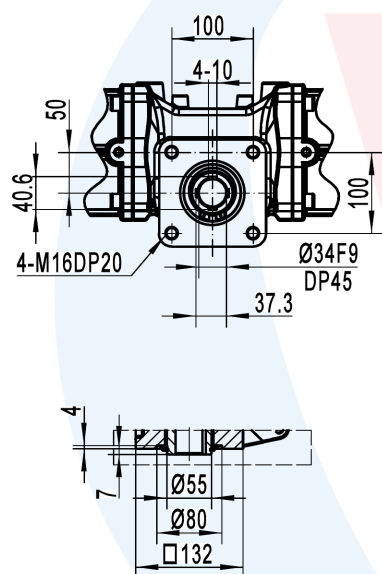

Top connection size

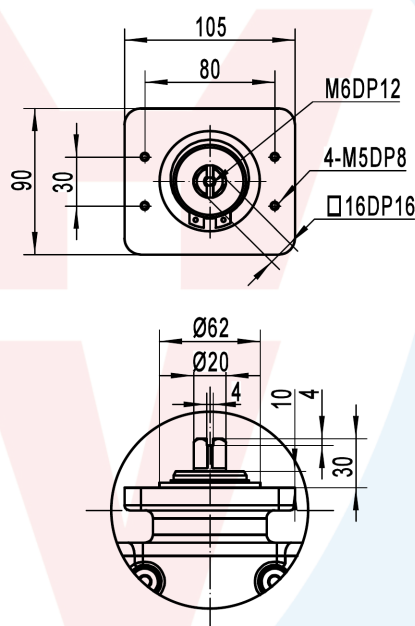

Side connection size

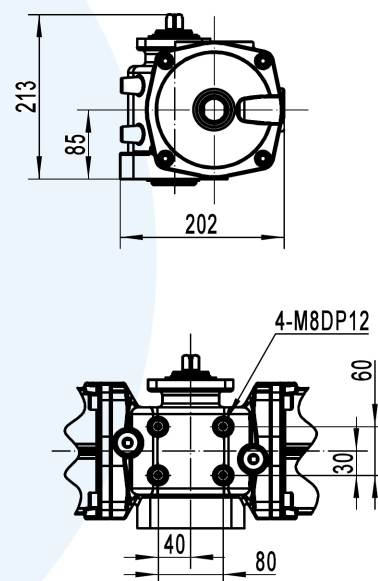

output torque (NM)

Model	Travel location	Air pressure torque								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
AW13	Start/End 0°-90°	695	811	927	1043	1159	1275	1391	1623	1855
	middle 45°	376	438	501	564	626	689	752	877	1002

Borrowing document		Model	Maximum pressure	Temperature (°C)	Rotation Angle	cylinder bore	Cylinder capacity (L)		Switch time (S)		Weight (kg)
							Inner side	Outer side	open	close	
Old base map number		AW13	8bar	ST (-20 to +80) HT (-15 to+150) LT (-40 to+80)	0°-90°(±5°)	Ø130	3.26	3.26	3.0	3.0	45.9
Base map number											
Sign											
Date		note: 1、 For the double-acting actuator AW13 type, the operating time is measured under the following conditions, (1) room temperature, (2) itinerary90°, (3) The diameter of the solenoid valve6mm, (4) The inner diameter of the tube is 8mm, and the length is 2 meters, (5) Neutral clean gas, (6) The air source pressure is 5.0 bar, (7) The actuator does not carry any load. 2、 If the user needs to quickly open and close the valve or open and close the valve within a specified time, it can be indicated when ordering and accessories related to speeding up the speed can be added.									
Archivist											
Date											