

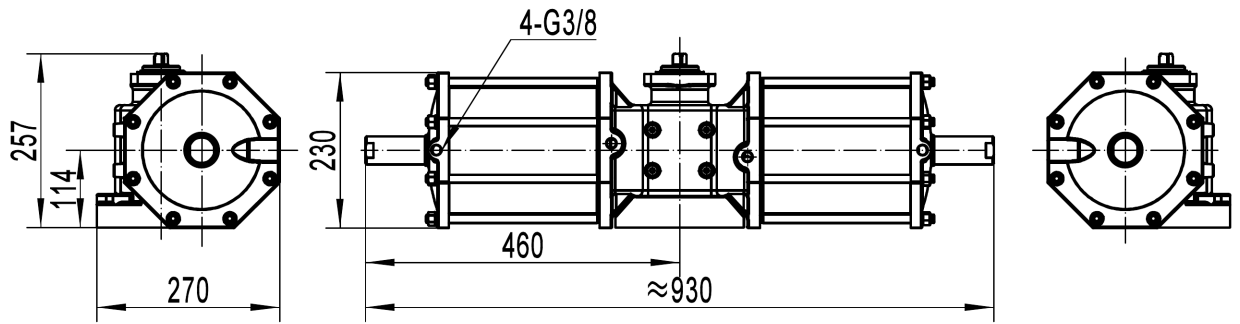


AW17




Connection Size


Connection size of bottom valve

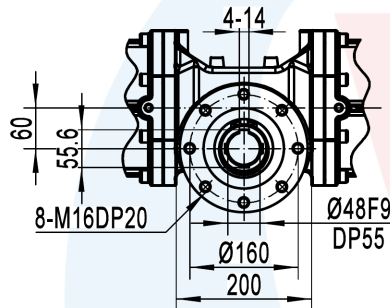

Top connection size

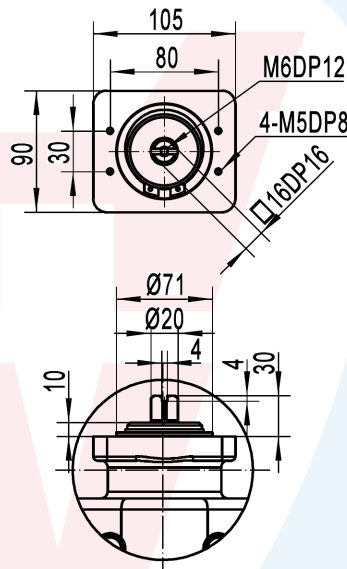

Side connection size

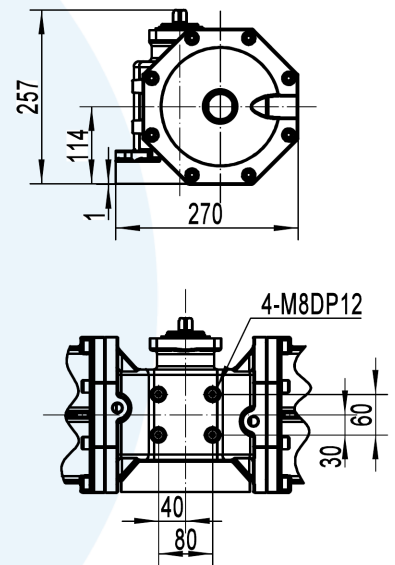

output torque (NM)

Model	Travel location	Air pressure torque								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
AW17	Start/End 0°-90°	1427	1665	1903	2141	2379	2617	2855	3331	3807
	middle 45°	771	900	1029	1157	1286	1414	1543	1800	2058

Borrowing document	Model	Maximum pressure	Temperature (°C)	Rotation Angle	cylinder bore	Cylinder capacity (L)		Switch time (S)		Weight (kg)
						Inner side	Outer side	open	close	
Old base map number	AW17	8bar	ST (-20to+80)	0°-90° (±5°)	Ø170	7.03	7.03	5.8	5.9	80.5
Base map number			HT (-20to+150) LT (-40+80)							

note: 1、 For the double-acting actuator AW13 type, the operating time is measured under the following conditions,
 (1) room temperature, (2) itinerary 90°, (3) The diameter of the solenoid valve 6mm, (4) The inner diameter of the tube is 8mm, and the length is 2 meters, (5) Neutral clean gas, (6) The air source pressure is 5.0 bar, (7) The actuator does not carry any load.
 2、 If the user needs to quickly open and close the valve or open and close the valve within a specified time, it can be indicated when ordering, and accessories related to speeding up the speed can be added.