



AW17S

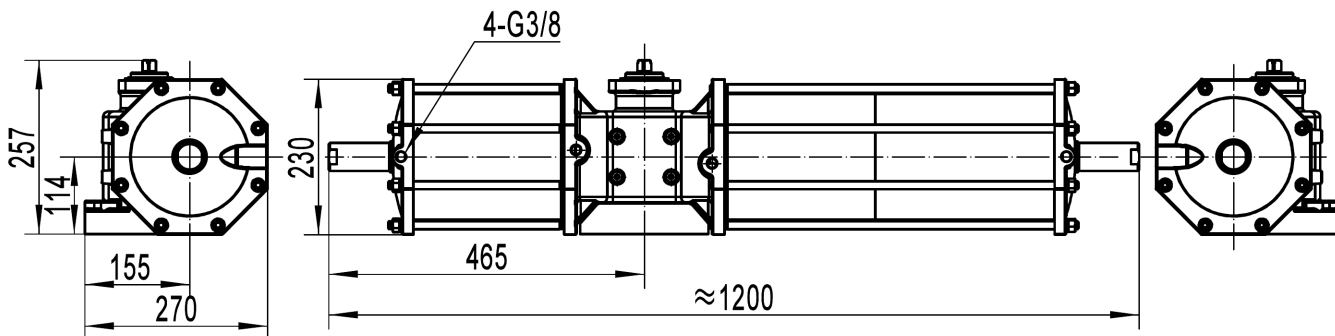


Connection Size


Connection size of bottom valve

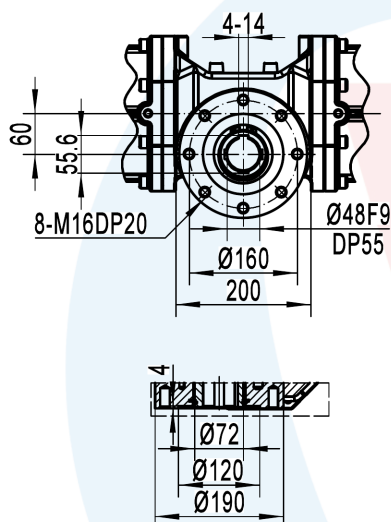

Top connection size

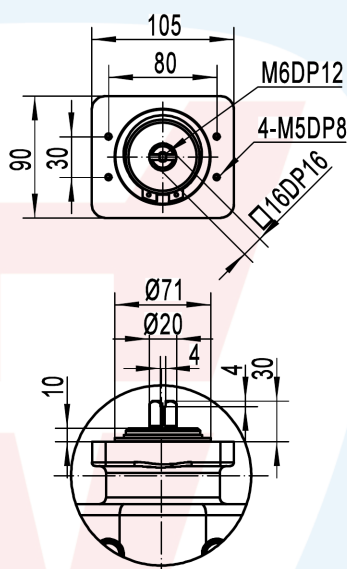

Side connection size

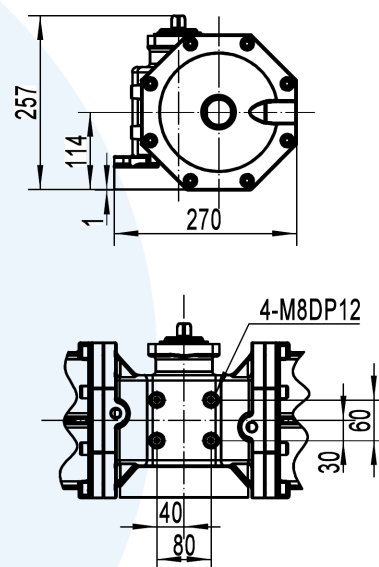

output torque (NM)

Model	Travel location	Air pressure torque									Travel location	Spring torque
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0		
AW17S	Start 0°	816	1054	1292	1530	1768	2005	2244	2720	3195	Start 90°	1217
	middle 45°	277	406	535	663	792	920	1050	1306	1564	middle 45°	494
	End 90°	210	448	687	925	1162	1400	1638	2115	2590	middle 0°	612

Model	Maximum pressure	Temperature (°C)	Rotation Angle	cylinder bore	Cylinder capacity (L)		Switch time (S)		Weight (kg)
					Inner side	Outer side	open	close	
AW17S	8bar	ST (-20to+80) HT (-20to+150) LT (-40+80)	0°-90° (±5°)	Ø170	7.03	000	7.4	6.8	101.9

note: 1、 For the double-acting actuator AW13 type, the operating time is measured under the following conditions, (1) room temperature, (2) itinerary 90°, (3) The diameter of the solenoid valve 6mm, (4) The inner diameter of the tube is 8mm, and the length is 2 meters, (5) Neutral clean gas, (6) The air source pressure is 5.0 bar, (7) The actuator does not carry any load.

2、 If the user needs to quickly open and close the valve or open and close the valve within a specified time, it can be indicated when ordering, and accessories related to speeding up the speed can be added.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date