




AW25

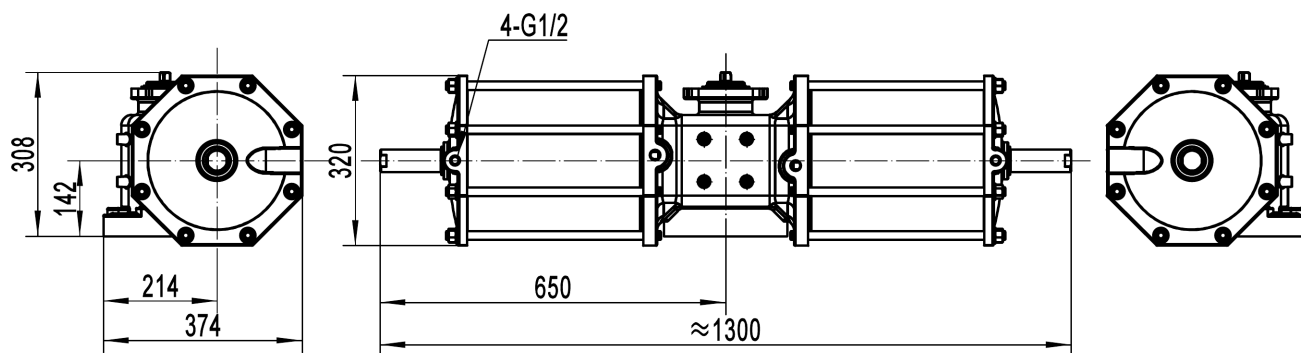


Connection Size
Connection size of bottom valve

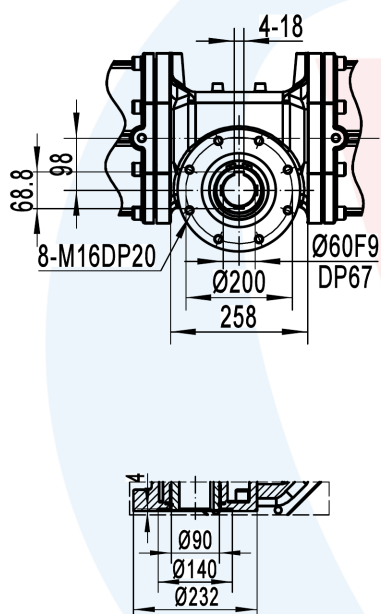

Top connection size

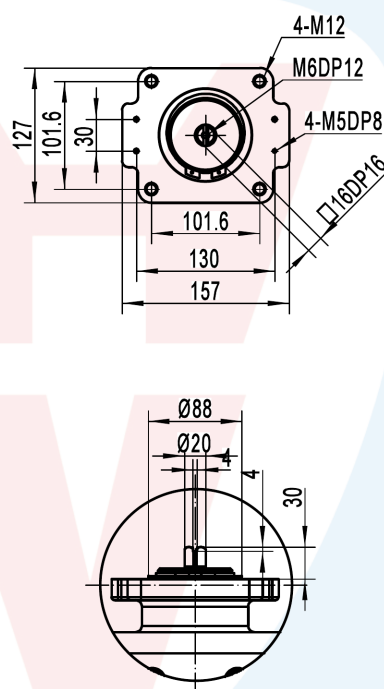

Side connection size

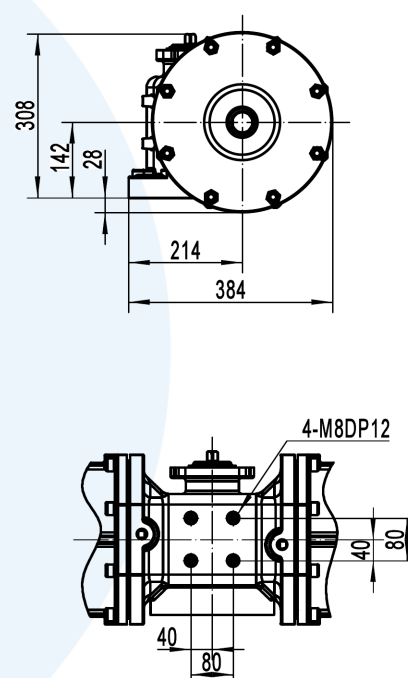

output torque (NM)

Model	Travel location	Air pressure torque								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
AW25	Start/End 0°-90°	5042	5884	6724	7565	8405	9246	10086	11768	13449
	middle 45°	2726	3180	3634	4089	4543	4998	5452	6361	7269
Model	Maximum pressure	Temperature (°C)	Rotation Angle	cylinder bore	Cylinder capacity (L)		Switch time (S)		Weight (kg)	
					Inner side	Outer side	open	close		
AW25	8bar	ST (-20to+80) HT (-20to+150) LT (-40+80)	0°-90°(±5°)	Ø250	23.63	23.63	7.0	7.3	189.5	

note: 1、 For the double-acting actuator AW13 type, the operating time is measured under the following conditions,

(1) room temperature, (2) itinerary 90°, (3) The diameter of the solenoid valve 6mm, (4) The inner diameter of the tube is 8mm, and the length is 2 meters, (5) Neutral clean gas, (6) The air source pressure is 5.0 bar, (7) The actuator does not carry any load.

2、 If the user needs to quickly open and close the valve or open and close the valve within a specified time, it can be indicated when ordering, and accessories related to speeding up the speed can be added.