




AW25S

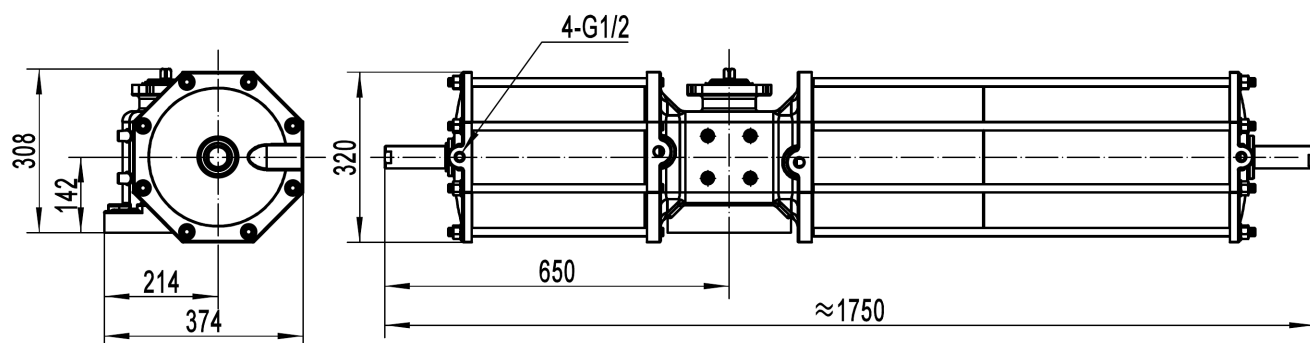


Connection Size
Connection size of bottom valve

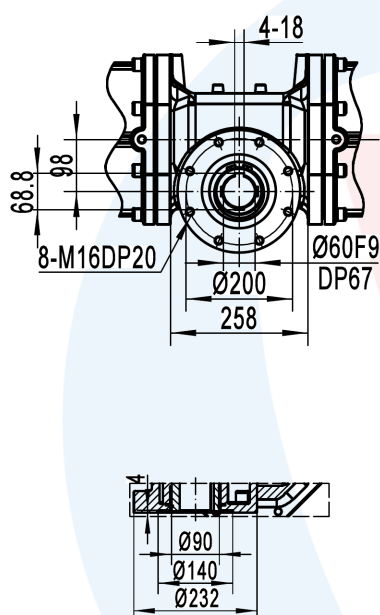

Top connection size

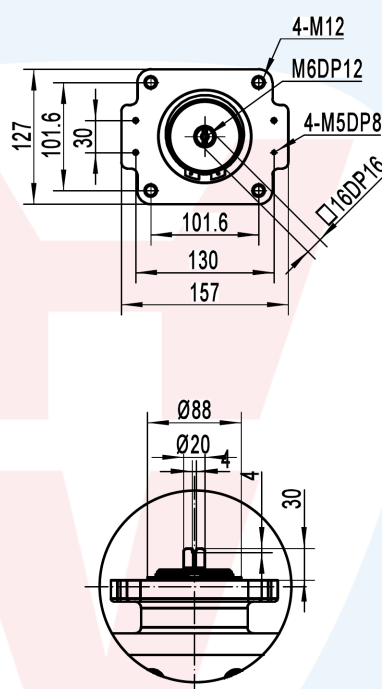

Side connection size

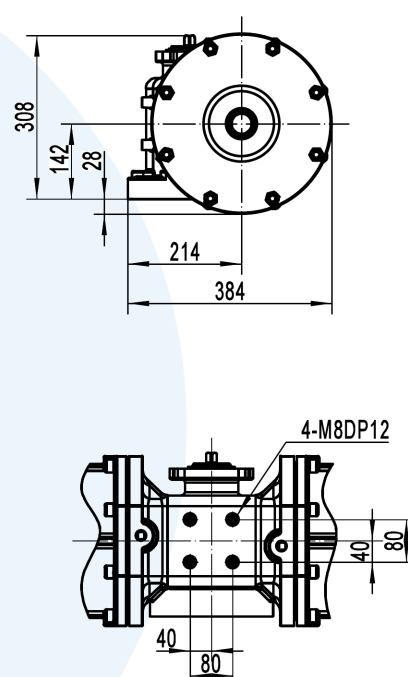

output torque (NM)

Model	Travel location	Air pressure torque									Travel location	Spring torque
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0		
AW25S	Start 0°	2698	3538	4380	5220	6060	6900	7742	9422	11104	Start 90°	3982
	middle 45°	1016	1470	1925	2380	2834	3288	3742	4652	5560	middle 45°	1710
	End 90°	1062	1902	2743	3584	4424	5265	6105	7787	9468	middle 0°	2346

Borrowing document		Model	Maximum pressure	Temperature (°C)	Rotation Angle	cylinder bore	Cylinder capacity (L)		Switch time (S)		Weight (kg)
							Inner side	Outer side	open	close	
Old base map number		AW25S	8bar	ST (-20to+80) HT (-20to+150) LT (-40+80)	0°-90°(±5°)	Ø250	14.98	000	7.5	6.0	271.5
Base map number											
Sign											
Date		note: 1、For the double-acting actuator AW13 type, the operating time is measured under the following conditions, (1) room temperature, (2) itinerary90°, (3) The diameter of the solenoid valve6mm, (4) The inner diameter of the tube is 8mm, and the length is 2 meters, (5) Neutral clean gas, (6) The air source pressure is 5.0 bar, (7) The actuator does not carry any load.									
Archivist	Date	2、If the user needs to quickly open and close the valve or open and close the valve within a specified time, it can be indicated when ordering and accessories related to speeding up the speed can be added.									