



AW28

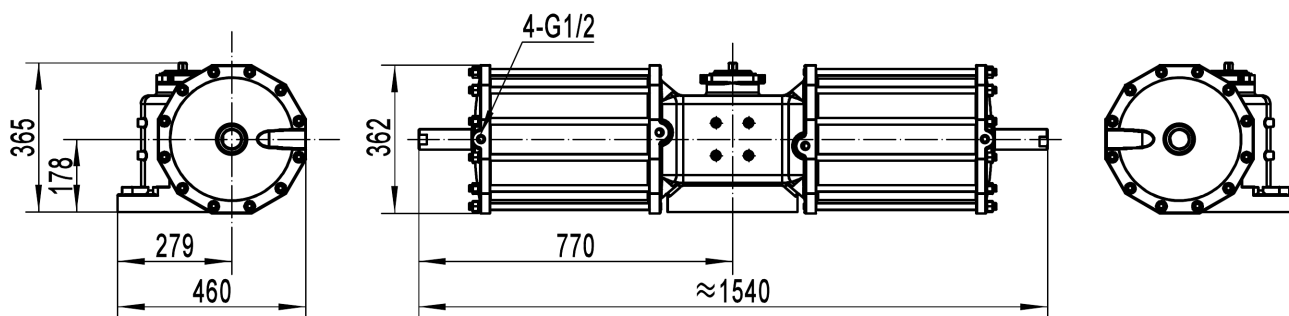


Connection Size


Connection size of bottom valve

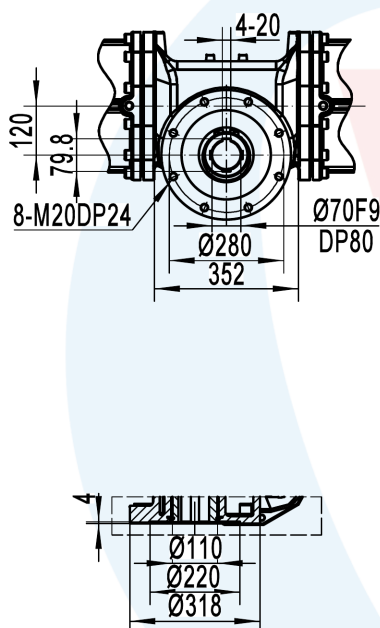

Top connection size

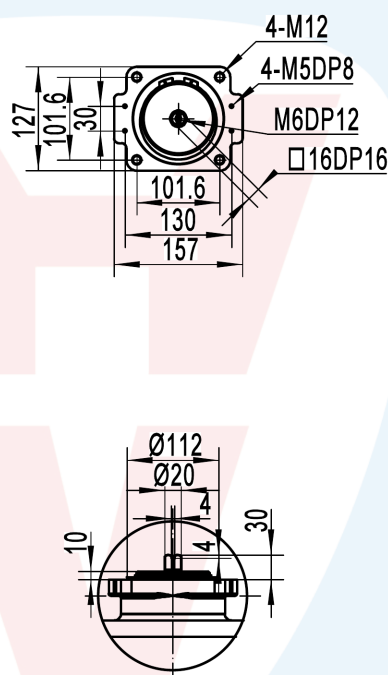

Side connection size

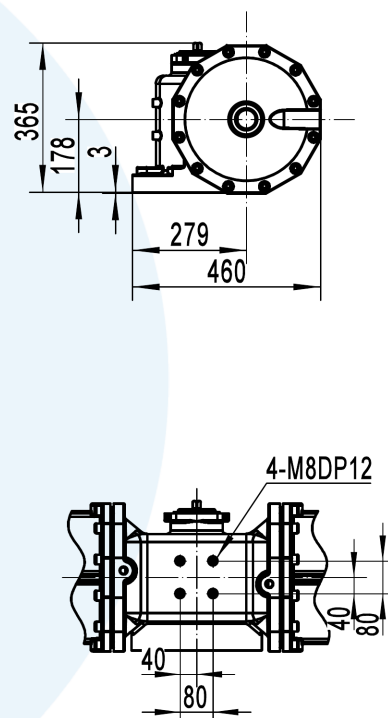

output torque (NM)

Model	Travel location	Air pressure torque								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
AW28	Start/End 0°-90°	7683	8962	10242	11523	12803	14084	15364	17925	20485
	middle 45°	4152	4844	5536	6228	6920	7613	8305	9689	11073
Model	Maximum pressure	Temperature (°C)		Rotation Angle	cylinder bore	Cylinder capacity (L)		Switch time (S)		Weight (kg)
						Inner side	Outer side	open	close	each
AW28	8bar	ST (-20to+80) HT (-20to+150) LT(-40to+80)		0°-90°(±5°)	Ø280	36.23	36.23	14.8	16.5	307

note: 1、 For the double-acting actuator AW13 type, the operating time is measured under the following conditions,

(1) room temperature, (2) itinerary90°, (3) The diameter of the solenoid valve6mm, (4) The inner diameter of the tube is 8mm, and the length is 2 meters, (5) Neutral clean gas, (6) The air source pressure is 5.0 bar, (7) The actuator does not carry any load.

2、 If the user needs to quickly open and close the valve or open and close the valve within a specified time, it can be indicated when ordering, and accessories related to speeding up the speed can be added.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date