




AW35

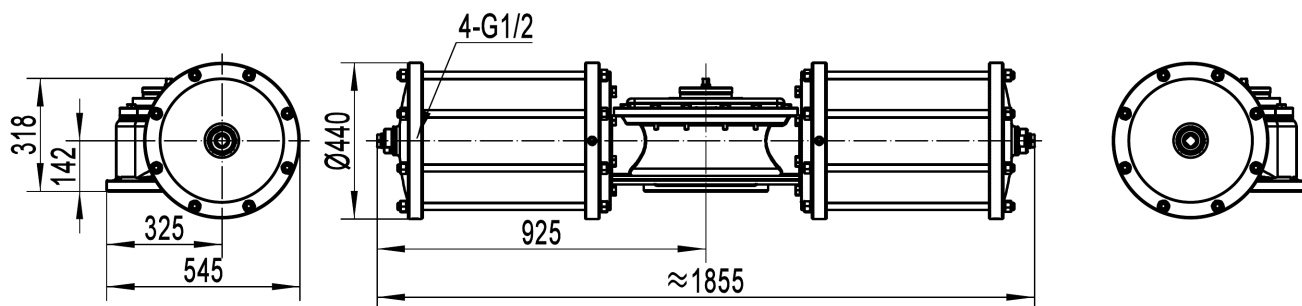


Connection Size Connection size of bottom valve

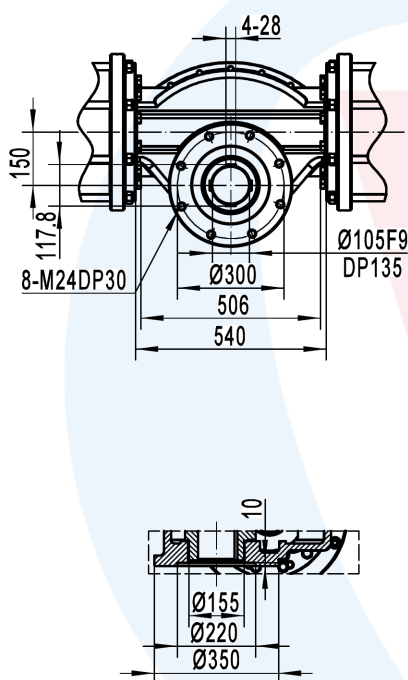

Top connection size

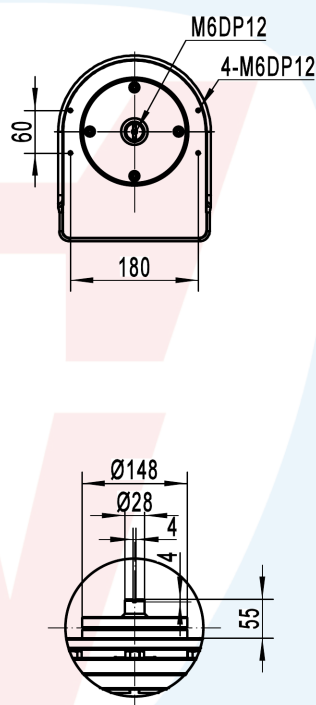

Side connection size



output torque (NM)

Model	Travel location	Air pressure torque								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
AW35	Start/End 0°-90°	15130	17652	20173	22695	25217	27739	30260	35304	40347
	middle 45°	8178	9541	10904	12267	13631	14994	16357	19083	21809

Borrowing document	Model	Maximum pressure	Temperature (°C)	Rotation Angle	cylinder bore	Cylinder capacity (L)		Switch time (S)		Weight (kg)
						Inner side	Outer side	open	close	
Old base map number	AW35	8bar	ST(-20to+80)	0°-90° (±5°)	Ø350	69.00	69.00	10	10	529.6
Base map number			HT(-20to+150) LT(-40to+80)							

note: 1、 For the double-acting actuator AW13 type, the operating time is measured under the following conditions,

(1) room temperature, (2) itinerary 90°, (3) The diameter of the solenoid valve 6mm, (4) The inner diameter of the tube is 8mm, and the length is 2 meters, (5) Neutral clean gas, (6) The air source pressure is 5.0 bar, (7) The actuator does not carry any load.

2、 If the user needs to quickly open and close the valve or open and close the valve within a specified time, it can be indicated when ordering, and accessories related to speeding up the speed can be added.