




AW35S

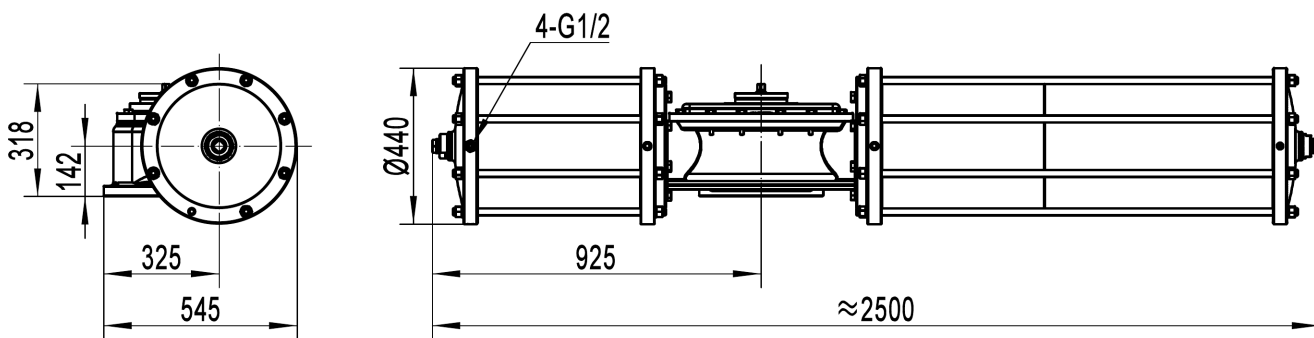


Connection Size
Connection size of bottom valve

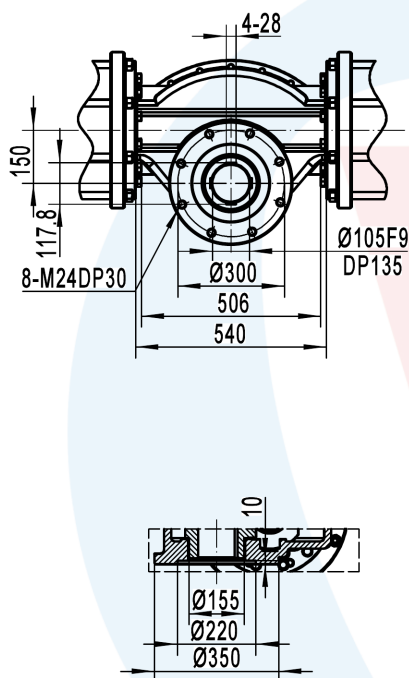

Top connection size

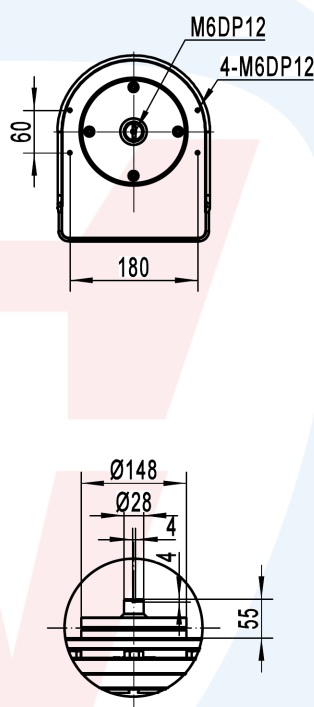

Side connection size



output torque (NM)

Model	Travel location	Air pressure torque									Travel location	Spring torque
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0		
AW35S	Start 0°	8430	10952	13474	15996	18517	21040	23562	28605	33648	Start 90°	13456
	middle 45°	2732	4094	5457	6820	8183	9546	10910	13635	16362	middle 45°	5448
	End 90°	1674	4195	6717	9240	11760	14282	16805	21848	26892	middle 0°	6700
Model	Maximum pressure	Temperature (°C)	Rotation Angle	cylinder bore	Cylinder capacity (L)		Switch time (S)		Weight (kg)			
					Inner side	Outer side	open	close				
AW35S	8bar	ST(-20to+80) HT(-20to+150) LT (-40+80)	0°-90° (±5°)	Ø350	69.00	000	10	10	529.6			

note: 1、 For the double-acting actuator AW13 type, the operating time is measured under the following conditions,
(1) room temperature, (2) itinerary90°, (3) The diameter of the solenoid valve6mm, (4) The inner diameter of the tube is 8mm, and the length is 2 meters, (5) Neutral clean gas, (6) The air source pressure is 5.0 bar, (7) The actuator does not carry any load.

2、 If the user needs to quickly open and close the valve or open and close the valve within a specified time, it can be indicated when ordering, and accessories related to speeding up the speed can be added.