



AW40

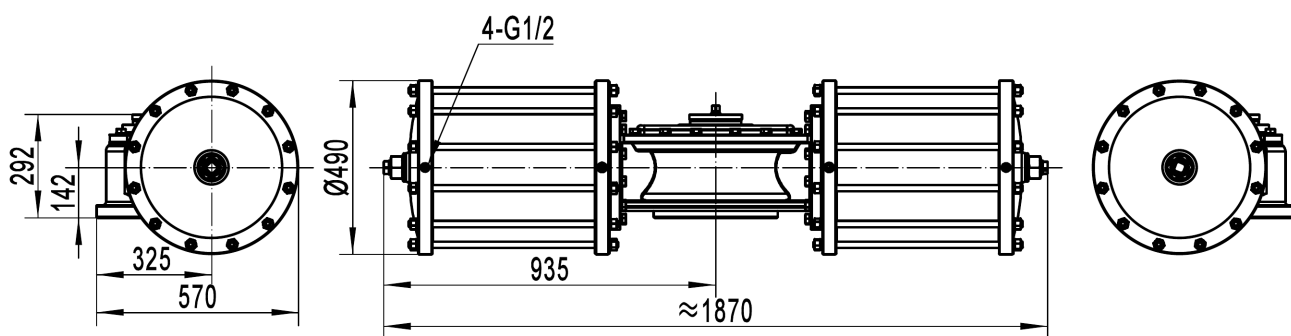


Connection Size


Connection size of bottom valve

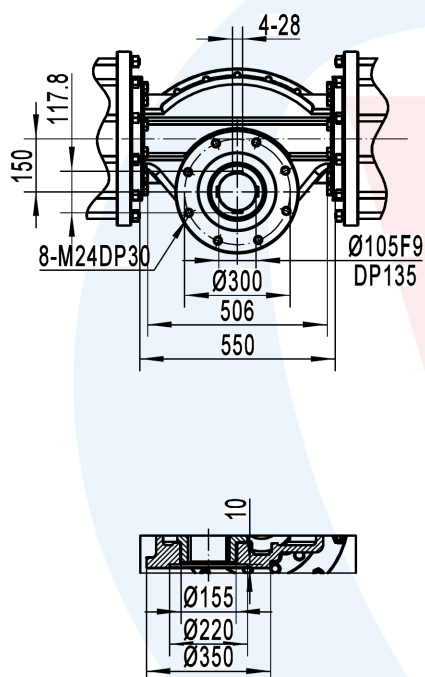

Top connection size

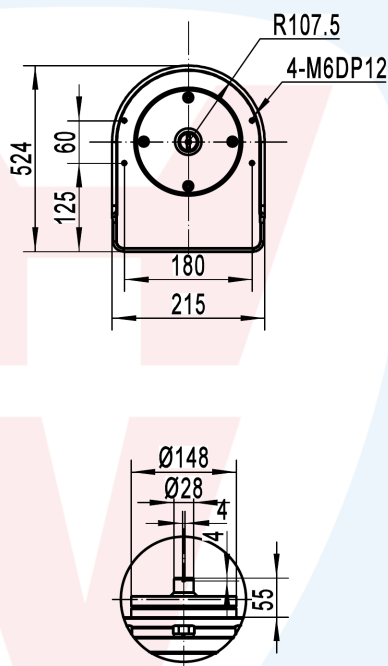

Side connection size



output torque (NM)

Model	Travel location	Air pressure torque								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
AW40	Start/End 0°-90°	19762	23055	26349	29643	32937	36230	39524	46111	52699
	middle 45°	10682	12462	14243	16023	17803	19584	21364	24925	28486

Borrowing document	Model	Maximum pressure	Temperature (°C)	Rotation Angle	cylinder bore	Cylinder capacity (L)		Switch time (S)		Weight (kg)
						Inner side	Outer side	open	close	
Old base map number	AW40	8bar	ST (-20to+80)	0°-90° (±5°)	Ø400	91.06	91.06	11.5	12.5	606.3
Base map number			HT (-20to+150)							
Sign			LT (-40+80)							

note: 1、For the double-acting actuator AW13 type, the operating time is measured under the following conditions,

(1) room temperature, (2) itinerary90°, (3) The diameter of the solenoid valve6mm, (4) The inner diameter of the tube is 8mm, and the length is 2 meters, (5) Neutral clean gas, (6) The air source pressure is 5.0 bar, (7) The actuator does not carry any load.

2、If the user needs to quickly open and close the valve or open and close the valve within a specified time, it can be indicated when ordering, and accessories related to speeding up the speed can be added.

Archivist	Date