



AW40S

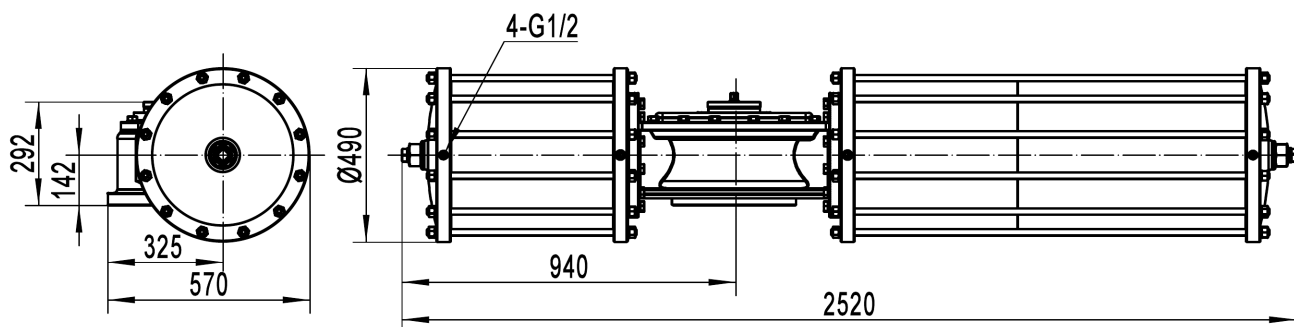


Connection Size


Connection size of bottom valve

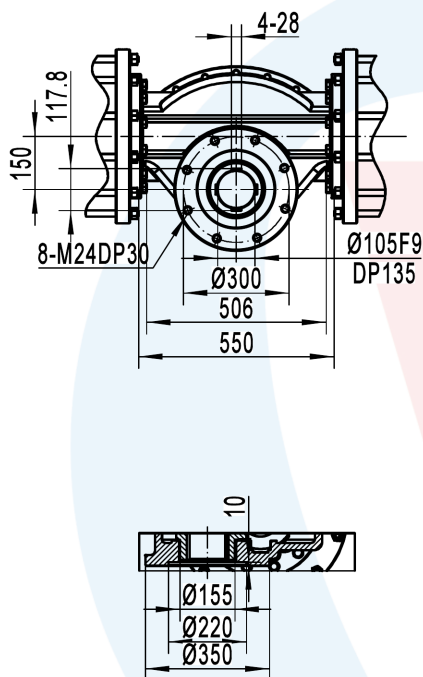

Top connection size

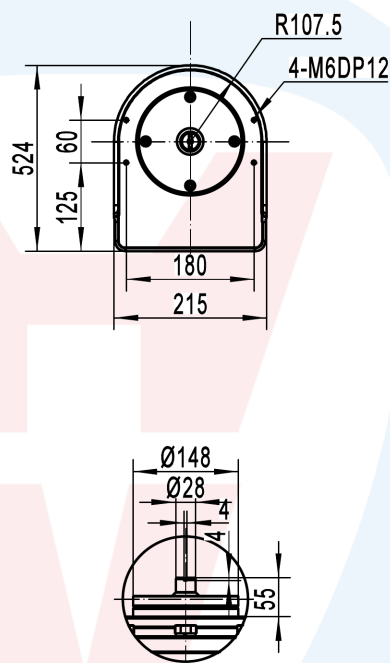

Side connection size



output torque (NM)

Model	Travel location	Air pressure torque									Travel location	Spring torque
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0		
AW40S	Start 0°	10834	14127	17420	20715	24008	27302	30595	37183	43770	Start 0°	17267
	middle 45°	3602	5382	7163	8944	10724	12504	14285	17845	21406	middle 45°	7080
	End 90°	2495	5788	9082	12376	15670	18963	22257	28844	35432	End 90°	8928

Borrowing document		Model	Maximum pressure	Temperature (°C)	Rotation Angle	cylinder bore	Cylinder capacity (L)		Switch time (S)		Weight (kg)
							Inner side	Outer side	open	close	each
Old base map number		AW40S	8bar	ST (-20to+80)	0°-90° (±5°)	Ø400	91.06	000	9.0	13	756.3
Base map number											
Sign											
Date		note: 1、For the double-acting actuator AW13 type, the operating time is measured under the following conditions, (1) room temperature, (2) itinerary90°, (3) The diameter of the solenoid valve6mm, (4) The inner diameter of the tube is 8mm, and the length is 2 meters, (5) Neutral clean gas, (6) The air source pressure is 5.0 bar, (7) The actuator does not carry any load.									
Archivist	Date										
		2、If the user needs to quickly open and close the valve or open and close the valve within a specified time, it can be indicated when ordering, and accessories related to speeding up the speed can be added.									