


AW60



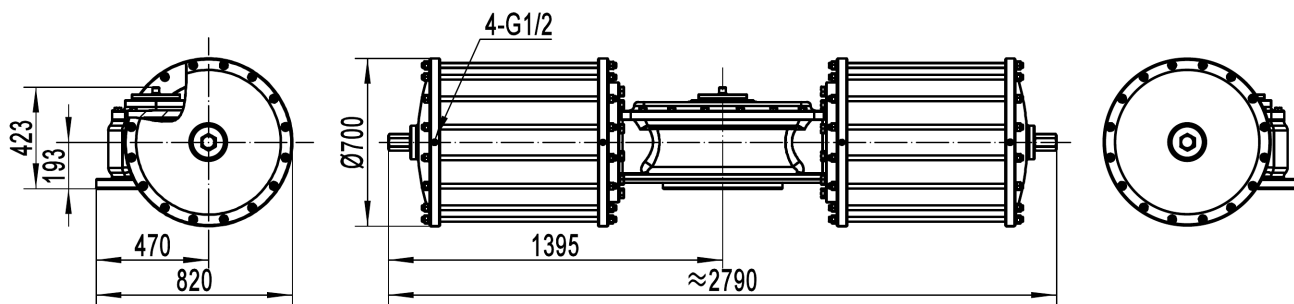


Connection Size

Connection size of bottom valve

Top connection size

Side connection size

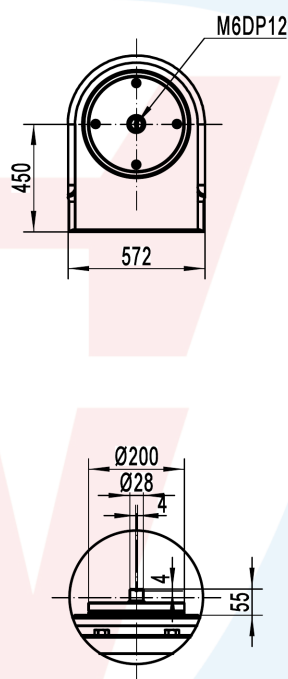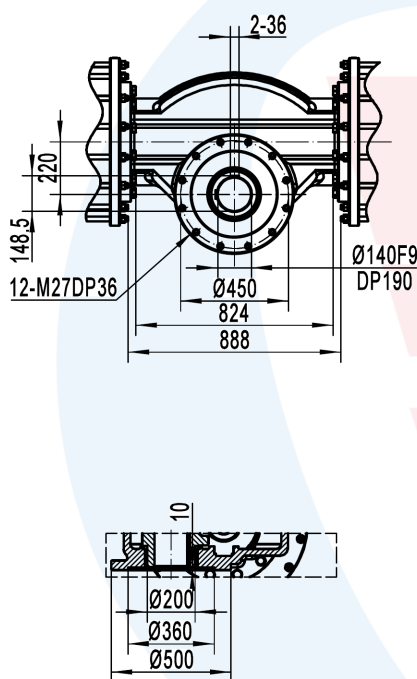

output torque (NM)

Model	Travel location	Air pressure torque								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
AW60	Start/End 0°-90°	65215	76084	86930	97822	108692	119561	130430	152169	173907
	middle 45°	35251	41126	47002	52877	58752	64627	70503	82253	94004
Model	Maximum pressure	Temperature (°C)	cylinder bore	cylinder bore	Cylinder capacity (L)		Switch time (S)		Weight (kg)	
					Inner side	Outer side	open	close	each	
AW60	8bar	ST (-20to+80) HT (-20to+150) LT (-40+80)	0°-90° (±5°)	Ø600	303.05	303.05	000	000		

note: 1、For the double-acting actuator AW13 type, the operating time is measured under the following conditions, (1) room temperature, (2) itinerary 90°, (3) The diameter of the solenoid valve 6mm, (4) The inner diameter of the tube is 8mm, and the length is 2 meters, (5) Neutral clean gas, (6) The air source pressure is 5.0 bar, (7) The actuator does not carry any load.

2、If the user needs to quickly open and close the valve or open and close the valve within a specified time, it can be indicated when ordering, and accessories related to speeding up the speed can be added.