

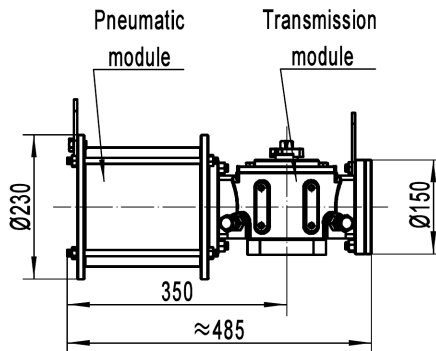


HG0-P180-DA




NPT1/4 Air source connectionx2




Connection Size-Updated date260130

Connection size of bottom valve

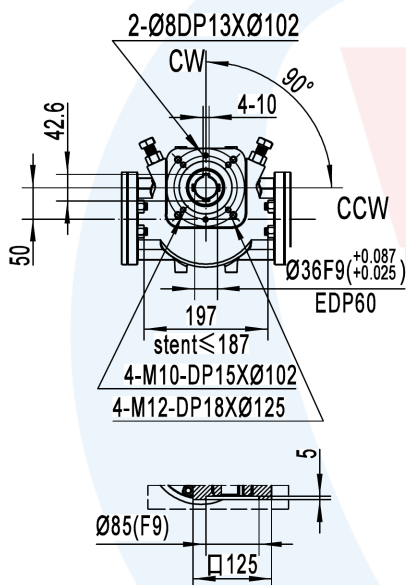


Top connection size

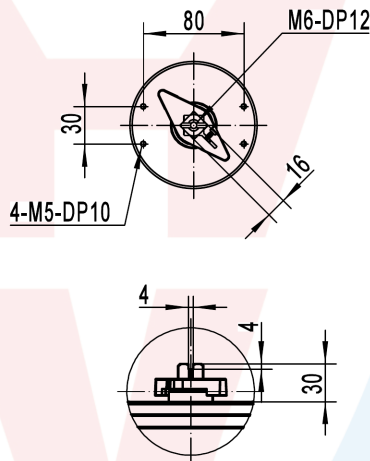


Side connection size

1.Mounting surface of accessories
(recommended to install solenoid valve,filter,etc.)



2.Mounting surface of accessories
(recommended to install MHP,etc.)



Output torque (Nm)

Type	position	Pressure (bar)								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
HG0-P180-DA	Start/End	667	778	889	1000	1111	1222	1334	1556	1778
	45°	361	421	481	541	601	661	721	841	961

Borrowing document	Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
					Inner side	Outer side	open	close	
Old base map number	HG0-P180-DA	8bar	0°-90°(±5°)	ST (-20 to +80)	3.2	3.3	2.0	2.0	39.6
Base map number				HT (-15 to+150) LT (-40 to+80)					

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.

Sign

Date

Archivist

Date