



HG0-P180-SR2

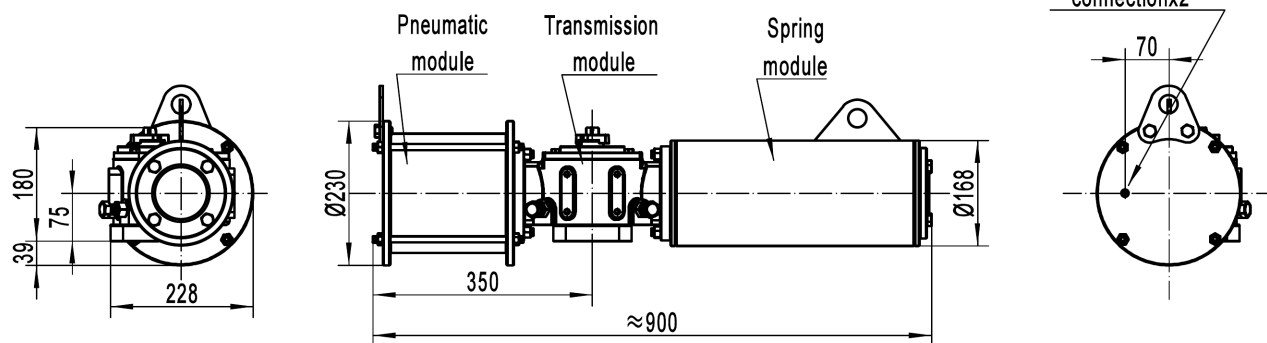


Connection Size-Updated date260130


Connection size of bottom valve

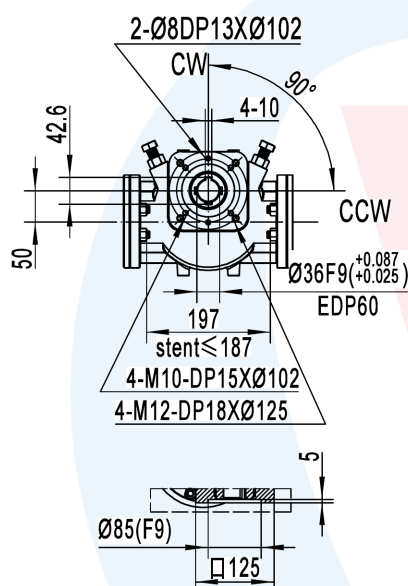

Top connection size

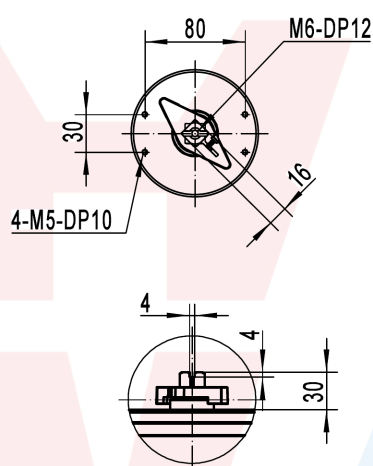

Side connection size

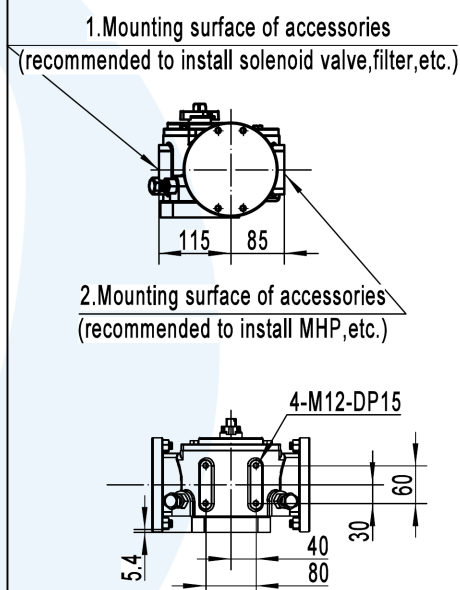

Output torque (Nm)

Type	position	Spring To rque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG0-P180-SR2	Start	520	327	438	549	660	771	882	994	1216
	45°	230	131	191	251	311	371	431	491	611
	End	340	147	258	369	480	591	702	814	1036
Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)		
				Inner side	Outer side	open	close			
HG0-P180-SR	8bar	0°-90°(±5°)	ST (-20 to +80) HT (-15 to+150) LT (-40 to+80)	3.2	——	2.5	3.0	63.9		

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date