

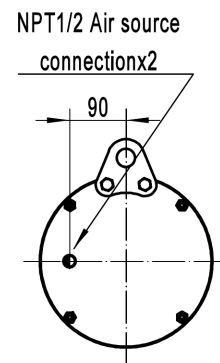
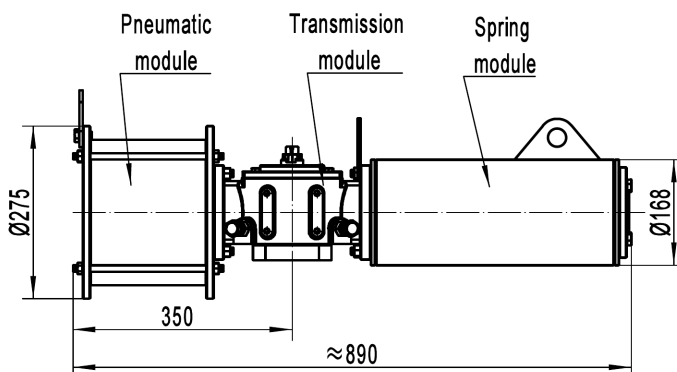


HG0-P220-SR3




Connection Size-Updated date260130


Connection size of bottom valve

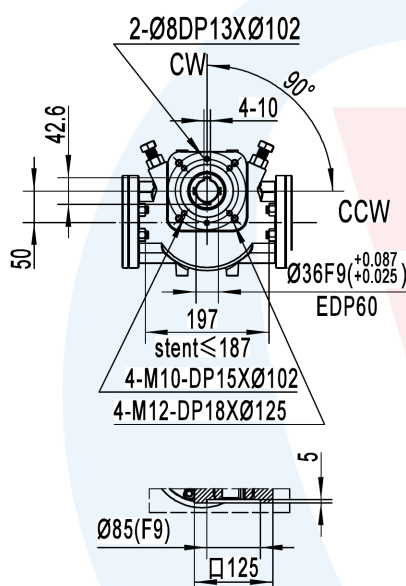

Top connection size

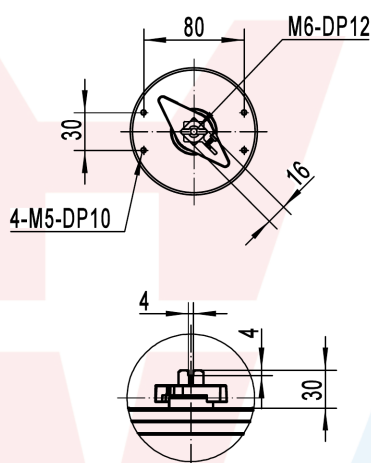

Side connection size

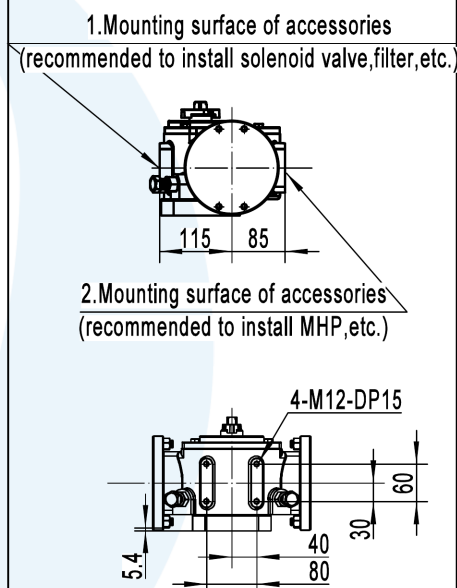

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG0-P220-SR3	开始	766	467	633	799	965	1131	1297	1463	1795
	中间	358	181	270	360	450	540	629	719	899
	结束	529	230	396	562	728	894	1060	1226	1558
Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)		
				Inner side	Outer side	open	close	each		
HG0-P220-SR	8bar	0°-90°(±5°)	ST (-20 to +80) HT (-15 to+150) LT (-40 to+80)	4.9	——	2.5	3.3	71.4		

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist Date