



HG1-P300-SR3

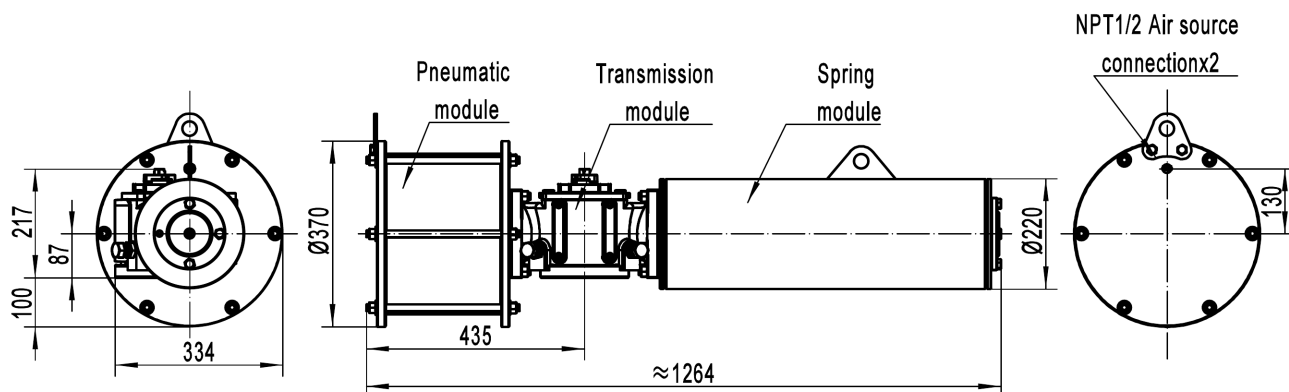


Accessory installation dimensions

-Updated date260130


Connection size of bottom valve

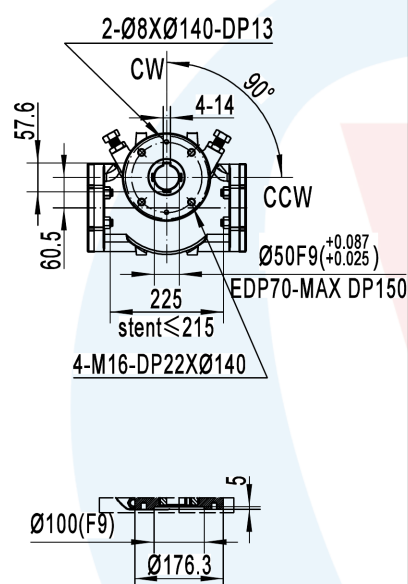

Top connection size

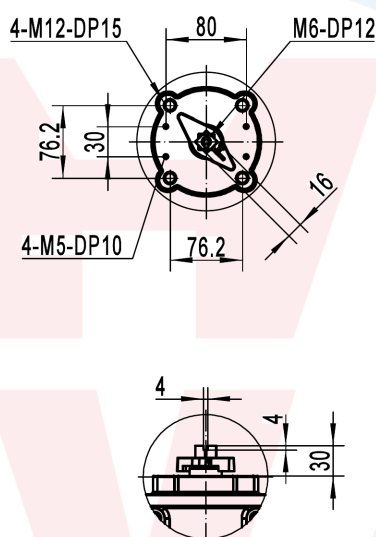

Side connection size

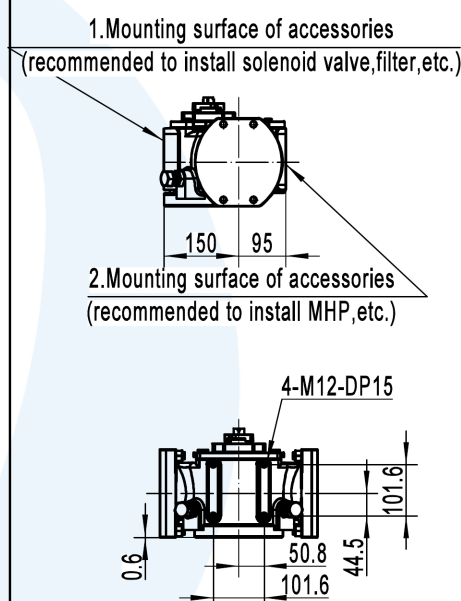

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG1-P300-SR3	Start	1750	993	1363	1733	2104	2474	2845	3215	3956
	45°	800	402	602	802	1003	1203	1403	1604	2004
	End	1230	473	843	1213	1584	1954	2325	2695	3436
Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)		
				Inner side	Outer side	open	close	each		
HG1-P300-SR	8bar	0°-90° (±5°)	ST (-20 to +80) HT (-15 to+150) LT (-40 to+80)	10.5	—	3.5	4.0	165		

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date