

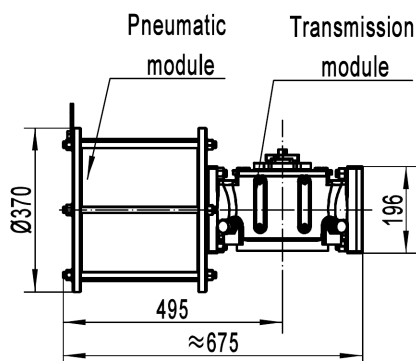


HG2-P300-DA




NPT1/2 Air source
connectionx2




Accessory installation dimensions

-Updated date260130


Connection size of bottom valve

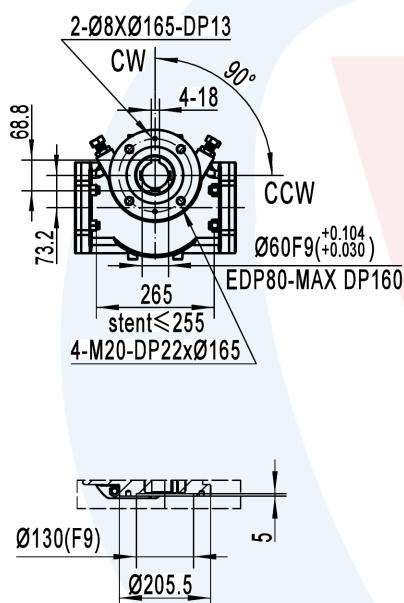

Top connection size

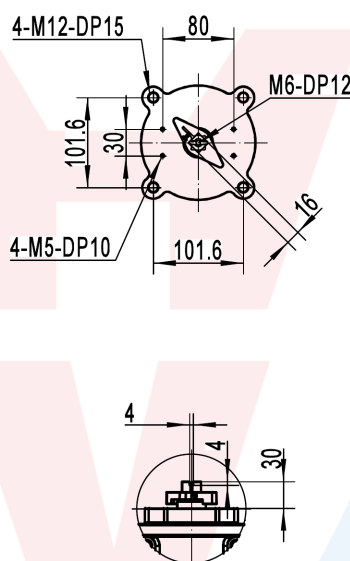

Side connection size

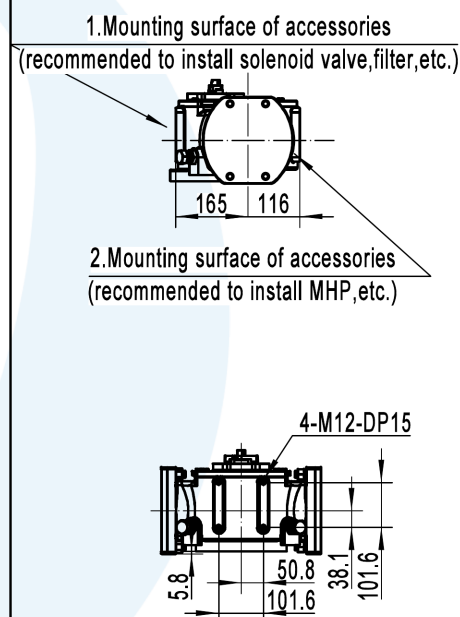

Output torque (Nm)

Type	position	Pressure (bar)								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
HG2-P300-DA	Start/End	2712	3163	3624	4077	4530	4983	5436	6342	7248
	45°	1466	1711	1955	2199	2444	2688	2932	3421	3910

Borrowing document	Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
					Inner side	Outer side	open	close	
Old base map number	HG2-P300-DA	8bar	0°-90° (±5°)	ST (-20 to +80)	13.5	15.0	3.0	3.0	115.3
Base map number				HT (-15 to +150) LT (-40 to +80)					

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.

2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.

3. The weights in the table do not include any attachments.