



HG2-P300-SR2

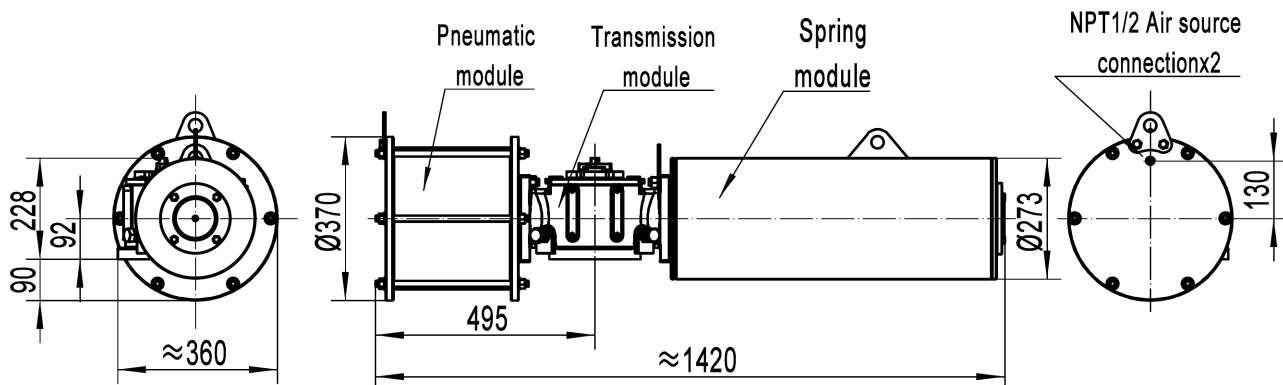


Accessory installation dimensions

-Updated date 260130


Connection size of bottom valve

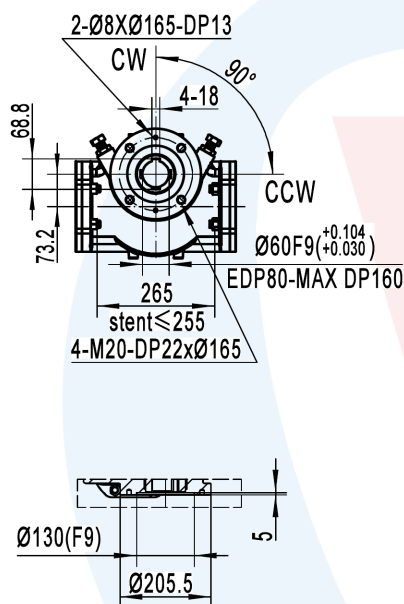

Top connection size

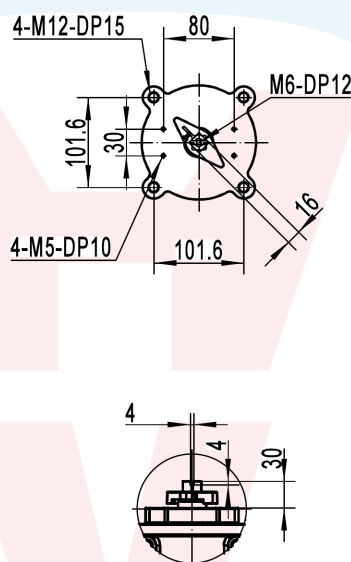

Side connection size

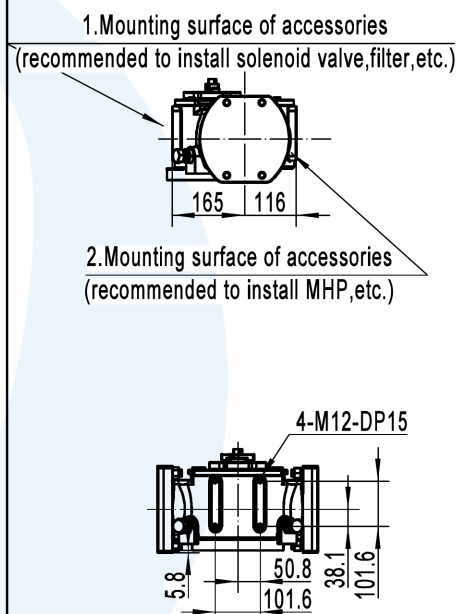

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG2-P300-SR2	Start	2130	1272	1723	2184	2637	3090	3543	3996	4902
	45°	960	506	751	995	1239	1484	1728	1972	2461
	End	1440	582	1033	1494	1947	2400	2853	3306	4212

Borrowing document	Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
					Inner side	Outer side	open	close	
Old base map number	HG2-P300-SR	8bar	0°-90° (±5°)	ST (-20 to +80)	13.5	---	4.0	5.0	218.8
Base map number				HT (-15 to +150) LT (-40 to +80)					

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
3. The weights in the table do not include any attachments.