



HG2-P350-SR3

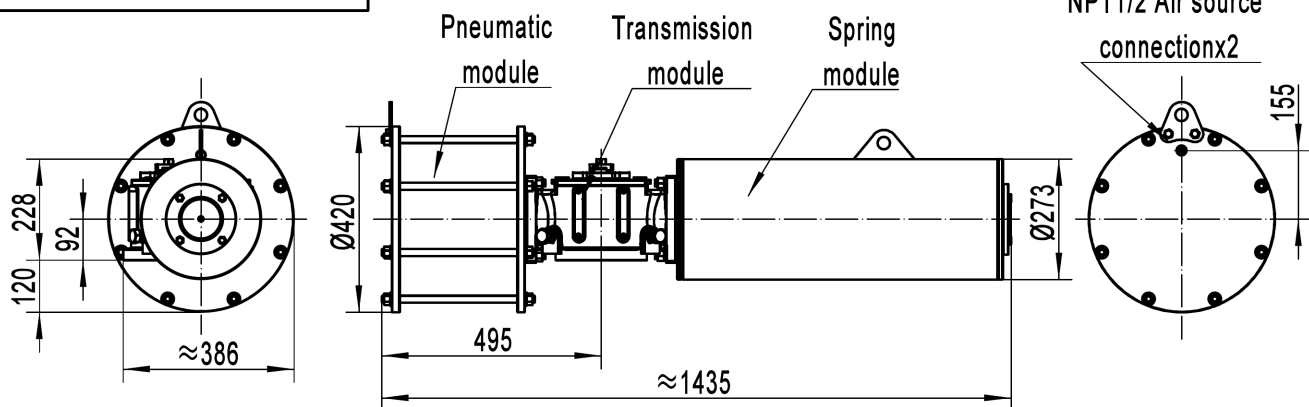


Accessory installation dimensions

-Updated date260130


Connection size of bottom valve

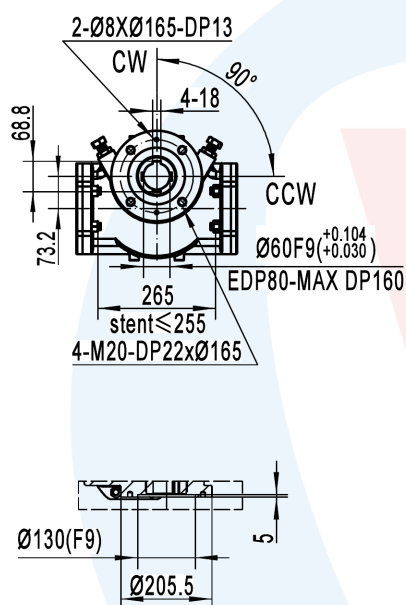

Top connection size

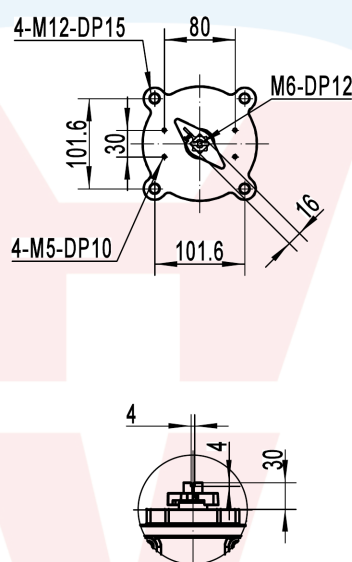

Side connection size

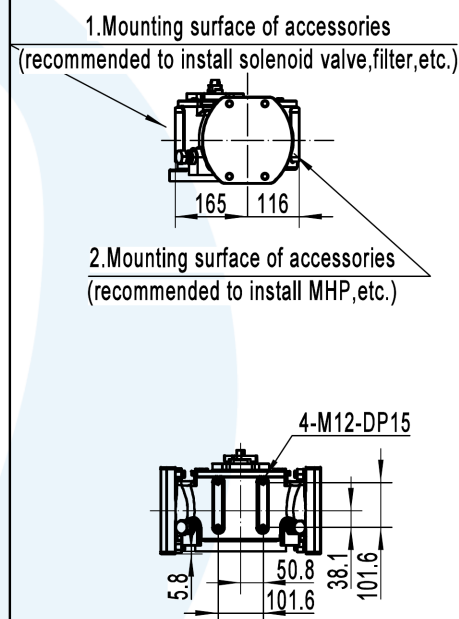

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG2-P350-SR3	Start	2900	1791	2406	3021	3636	4251	4866	5481	6712
	45°	1300	696	1028	1361	1693	2026	2359	2691	3356
	End	1900	791	1406	2021	2636	3251	3866	4481	5712

Borrowing document	Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
					Inner side	Outer side	open	close	
Old base map number	HG2-P350-SR	8bar	0°-90° (±5°)	ST (-20 to +80)	16.5	---	4.5	5.5	248.3
Base map number				HT (-15 to +150) LT (-40 to +80)					

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
3. The weights in the table do not include any attachments.

Sign

Date

Archivist Date