



HG2-P350-SR4

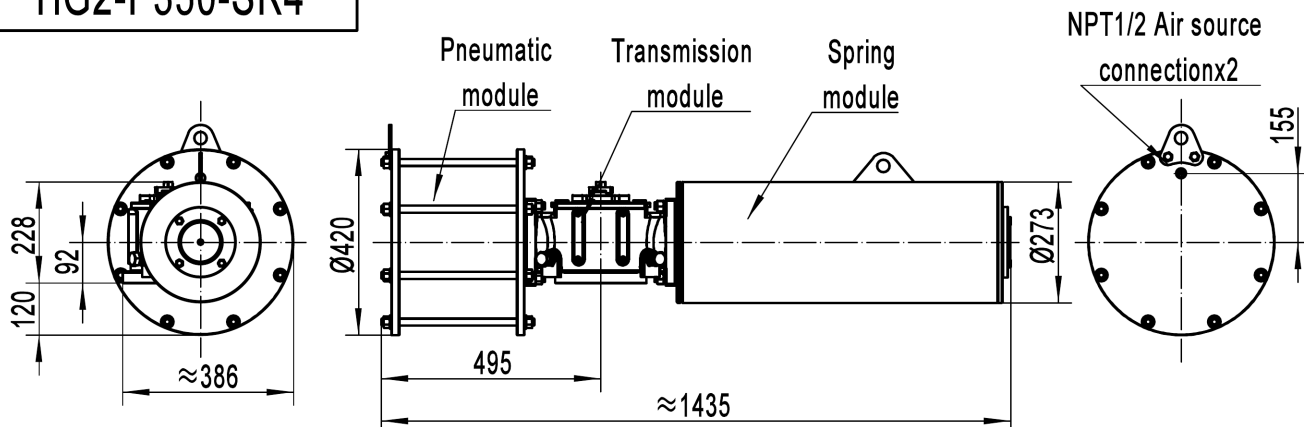


Accessory installation dimensions

-Updated date260130



Connection size of bottom valve

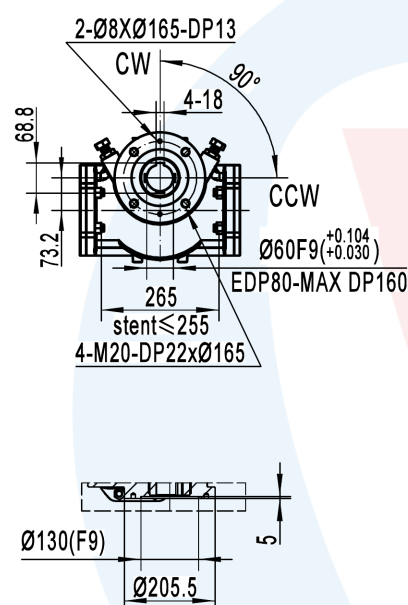

Top connection size

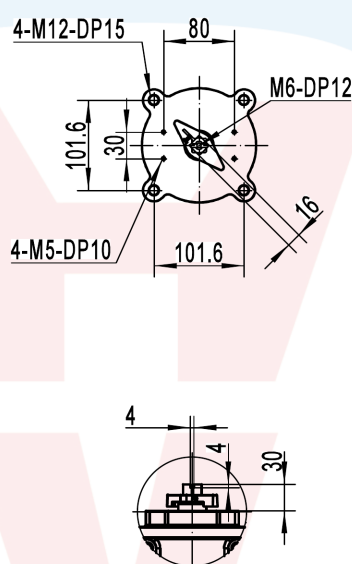

Side connection size

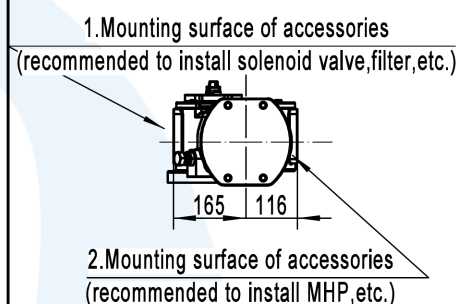

单作用式输出扭矩

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG2-P350-SR4	Start	3600			2451	3066	3681	4296	4911	6142
	45°	1690			971	1303	1636	1969	2301	2966
	End	2470			1321	1936	2551	3166	3781	5012

Borrowing document	Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
					Inner side	Outer side	open	close	
Old base map number	HG2-P350-SR	8bar	0°-90° (±5°)	ST (-20 to +80)	16.5	---	4.5	5.5	248.3
Base map number				HT (-15 to +150) LT (-40 to +80)					

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
3. The weights in the table do not include any attachments.

Sign

Date

Archivist Date