



HG3-P350-SR2

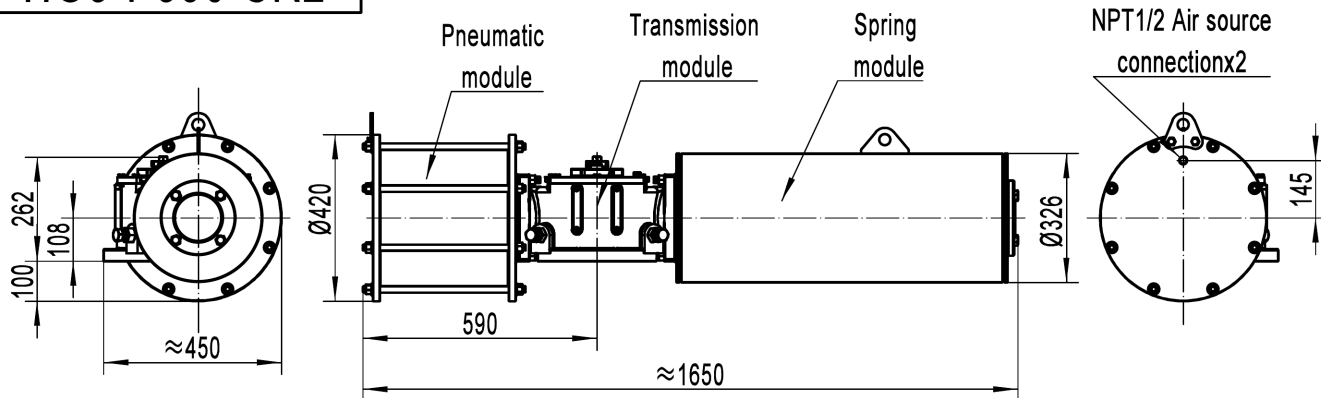


Accessory installation dimensions

-Updated date260130


Connection size of bottom valve

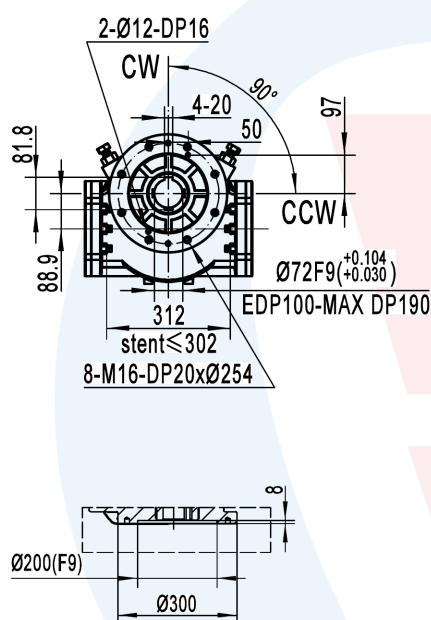

Top connection size

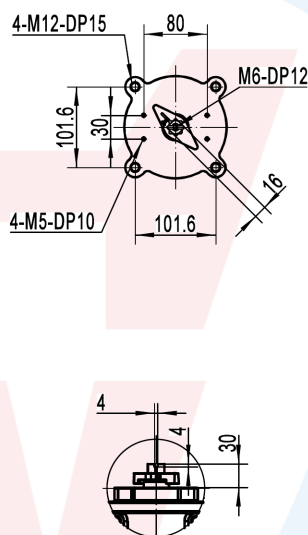

Side connection size

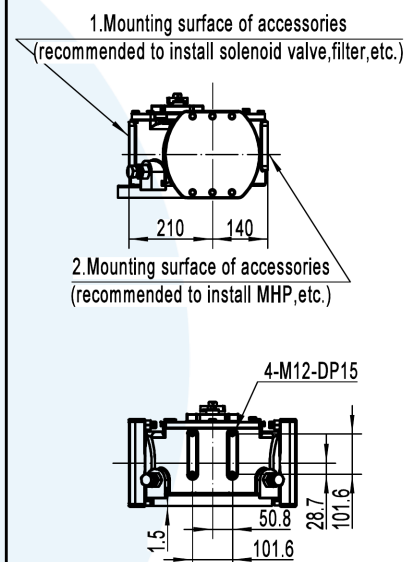

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG3-P350-SR2	Start	3660	2182	2929	3691	4440	5189	5937	6686	8184
	45°	1610	814	1218	1621	2025	2429	2833	3237	4045
	End	2300	822	1569	2331	3080	3829	4577	5326	6824

Borrowing document	Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
					Inner side	Outer side	open	close	
Old base map number	HG3-P350-SR	8bar	0°-90° (±5°)	ST (-20 to +80)	21.5	---	4.0	5.0	339.3
Base map number				HT (-15 to +150) LT (-40 to +80)					

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.