



HG3-P350-SR3

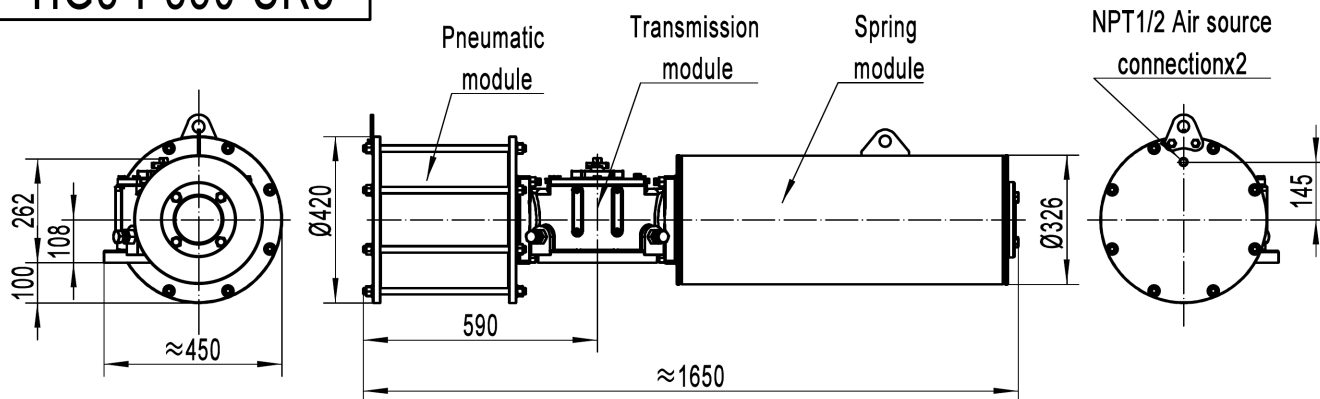


Accessory installation dimensions

-Updated date260130



Connection size of bottom valve

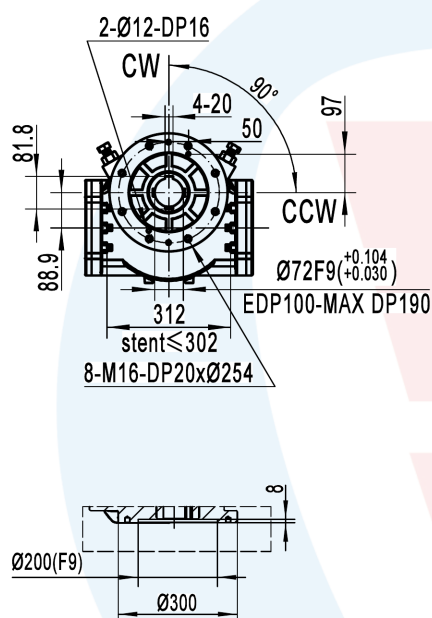

Top connection size

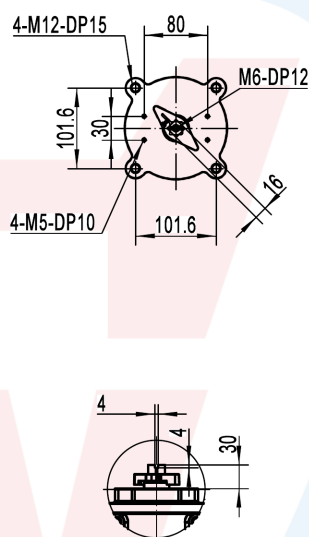

Side connection size

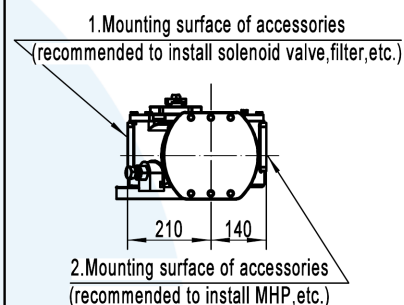

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG3-P350-SR3	Start	4800			2991	3740	4489	5237	5986	7484
	45°	2100			1131	1535	1939	2343	2747	3555
	End	3000			1191	1940	2689	3437	4186	5684

	Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
Borrowing document					Inner side	Outer side	open	close	each
	HG3-P350-SR	8bar	0°-90° (±5°)	ST (-20 to +80)	21.5	---	4.0	5.0	339.3
Old base map number				HT (-15 to+150)					
Base map number				LT (-40 to+80)					

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.

2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.

3. The weights in the table do not include any attachments.