HG3-P400-SR3

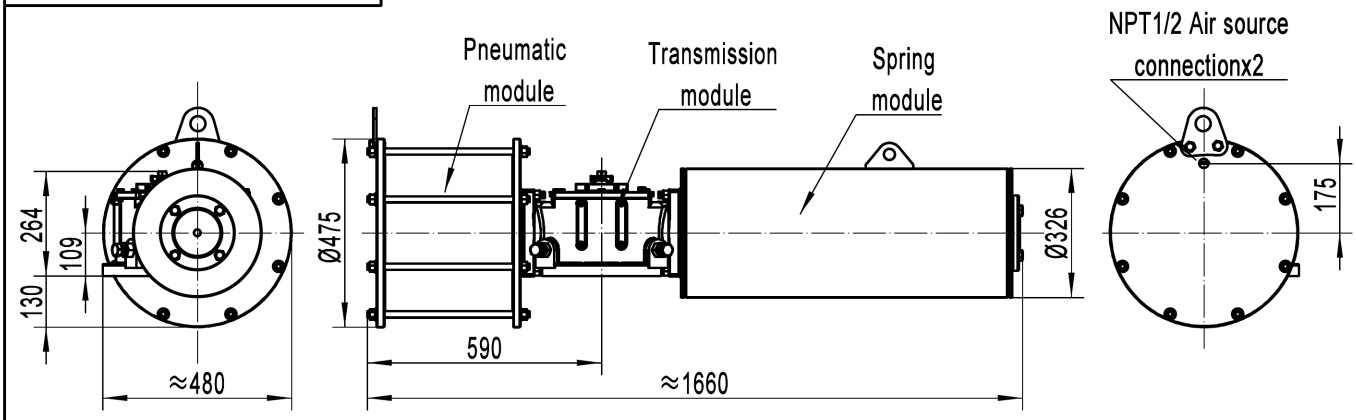

Accessory installation dimensions

-Updated date260130

Connection size of bottom valve

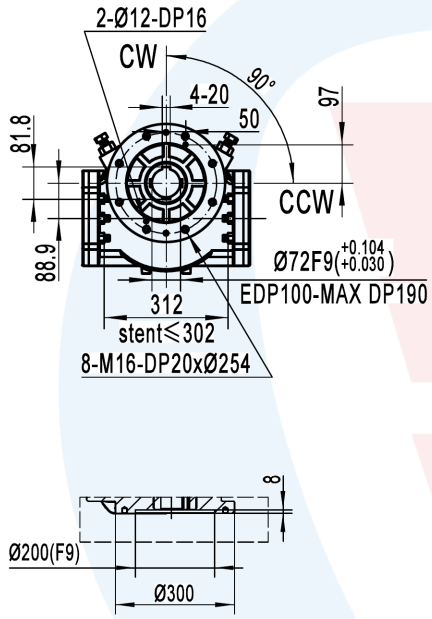

Top connection size





Side connection size

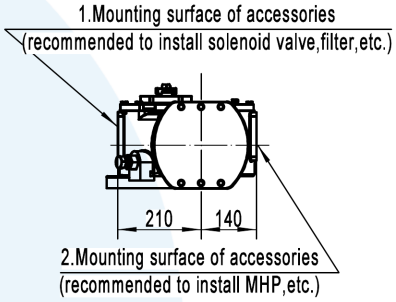



Output torque（Nm）

Type	position	Spring Torque Start	Pressure（bar）							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG3-P400-SR3	Start	4800	2854	3830	4806	5782	6757	7733	8709	10660
	45°	2100	1066	1593	2121	2648	3176	3703	4231	5286
	End	3000	1054	2030	3006	3982	4957	5933	6909	8860

Type	Maximum pressure	Rotation Angle	Temperature（°C）	Cylinder capacity（L）		Switch time（S）		Weight（kg）
				Inner side	Outer side	open	close	each
HG3-P400-SR	8bar	0°-90°（±5°）	ST（-20 to +80） HT（-15 to+150） LT（-40 to+80）	25.0	---	4.5	5.5	379.5

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
3. The weights in the table do not include any attachments.

Borrowing document	
Old base map number	
Base map number	
Sign	
Date	
Archivist	Date