


HG3-P400-SR4

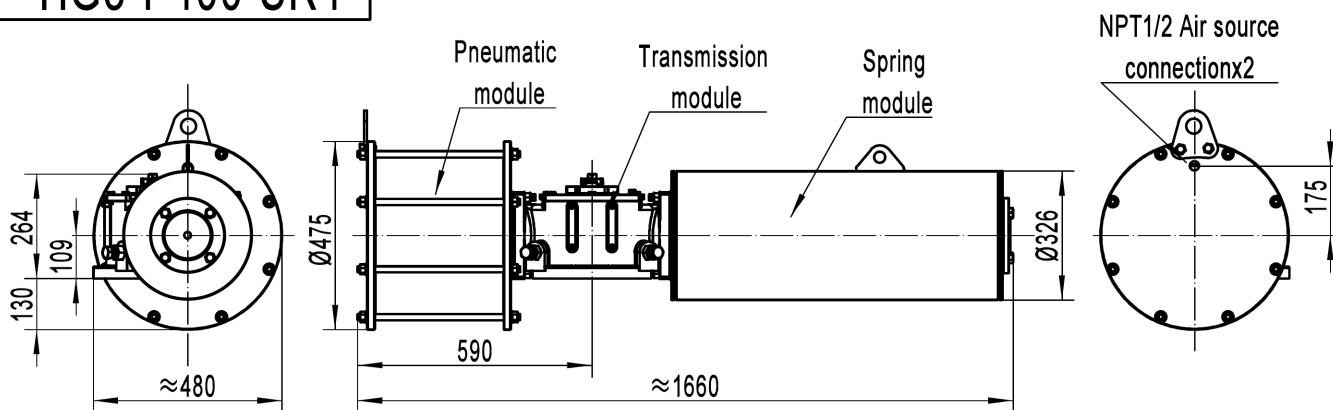




Accessory installation dimensions

-Updated date260130

Connection size of bottom valve

Top connection size

Side connection size

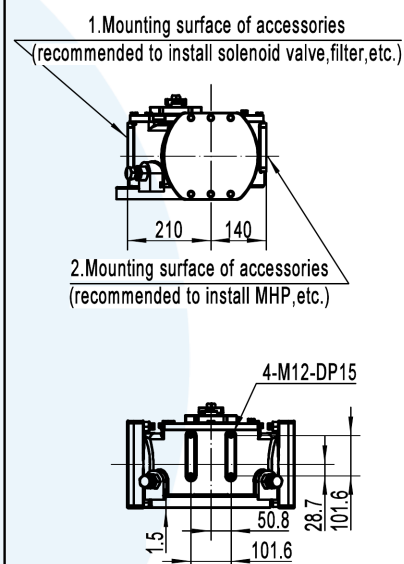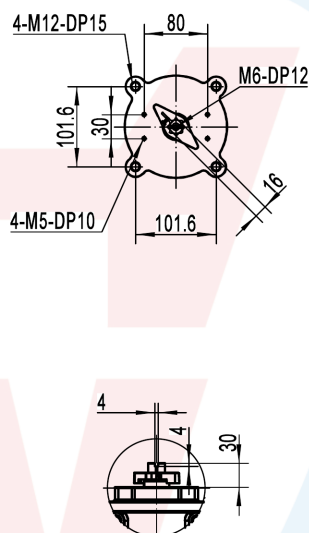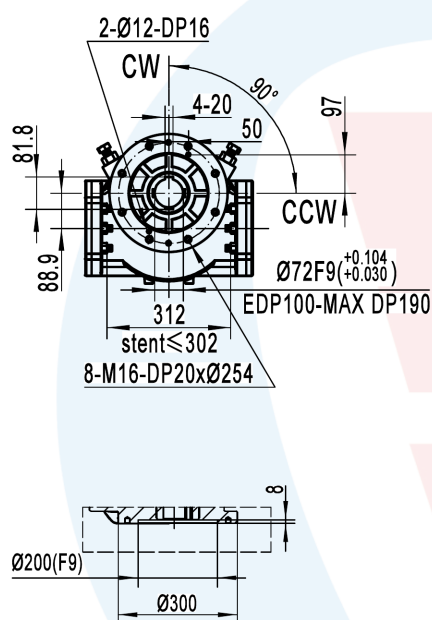

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG3-P400-SR4	Start	6000		3250	4226	5202	6177	7153	8129	10080
	45°	2650		1043	1571	2098	2626	3153	3681	4736
	End	3580		830	1806	2782	3757	4733	5709	7660

	Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
Borrowing document					Inner side	Outer side	open	close	
Old base map number	HG3-P400-SR	8bar	0°-90° (±5°)	ST (-20 to +80)	25.0	---	4.5	5.5	379.5
				HT (-15 to+150)					
Base map number				LT (-40 to+80)					

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.

2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.

3. The weights in the table do not include any attachments.