HG4-P400-DA

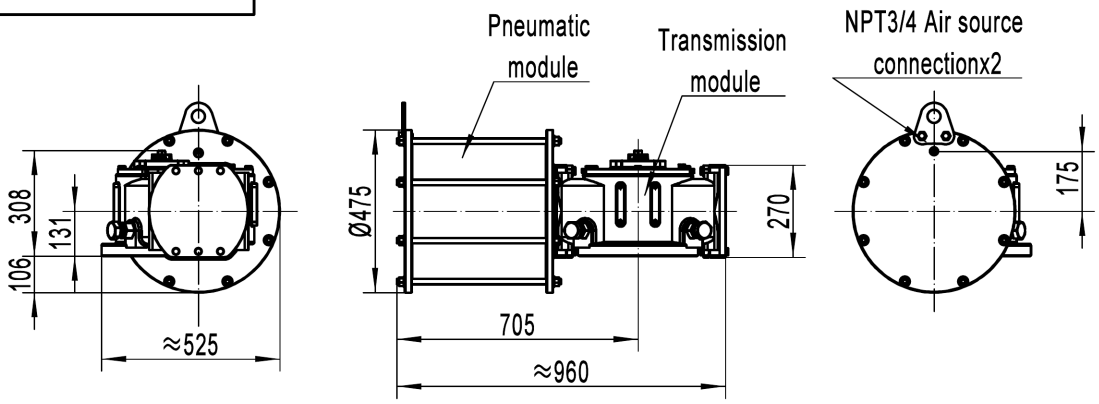

Accessory installation dimensions

-Updated date260130

Connection size of bottom valve

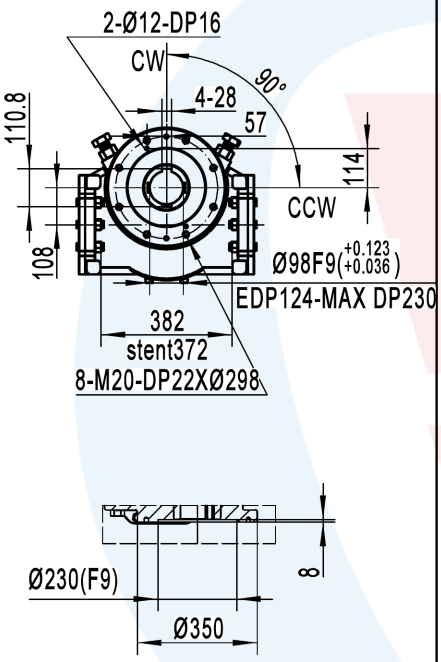

Top connection size

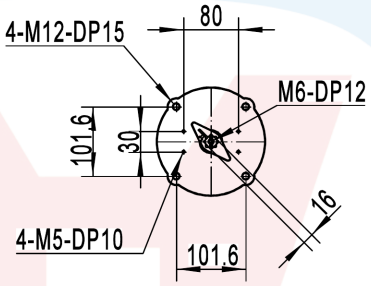



Side connection size

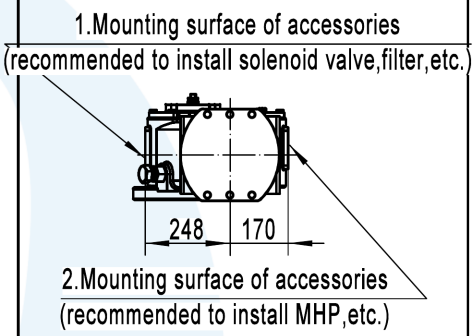



Output torque（Nm）

Type	position	Pressure（bar）								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
HG4-P400-DA	Start/End	7112	8298	9506	10694	11882	13071	14259	16635	19012
	45°	3846	4487	5127	5768	6409	7050	7691	8973	10255

Type	Maximum pressure	Rotation Angle	Temperature（°C）	Cylinder capacity（L）		Switch time（S）		Weight（kg）
				Inner side	Outer side	open	close	each
HG4-P400-DA	8bar	0°-90°（±5°）	ST（-20 to +80） HT（-15 to+150） LT（-40 to+80）	21.5	24.0	4.0	4.0	295.8

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
3. The weights in the table do not include any attachments.

Borrowing document	
Old base map number	
Base map number	
Sign	
Date	
Archivist	Date