



HG4-P400-SR2

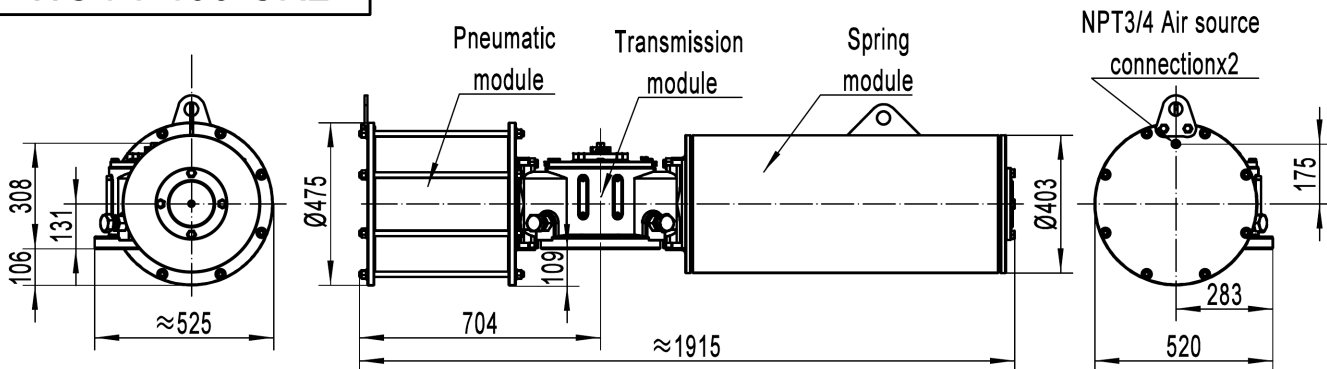


Accessory installation dimensions

-Updated date 260130


Connection size of bottom valve

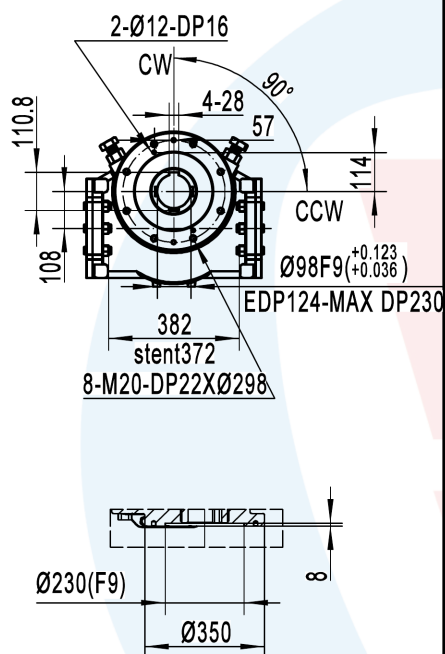

Top connection size

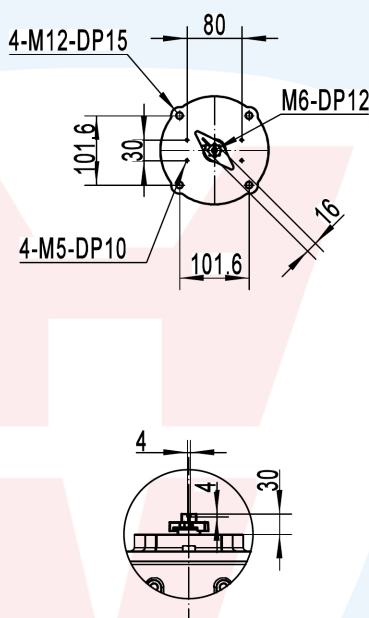

Side connection size

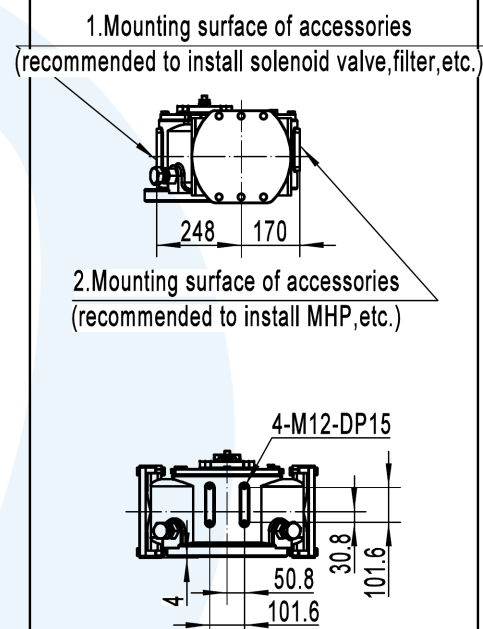

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG4-P400-SR2	Start	6048	3738	4924	6132	7320	8508	9697	10885	13261
	45°	2547	1299	1940	2580	3221	3862	4503	5144	6426
	End	3374	1064	2250	3458	4646	5834	7023	8211	10587

Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
				Inner side	Outer side	open	close	
HG4-P400-SR	8bar	0°-90° (±5°)	ST (-20 to +80) HT (-15 to +150) LT (-40 to +80)	21.5	---	4.0	5.0	558.2

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date