



HG4-P400-SR3

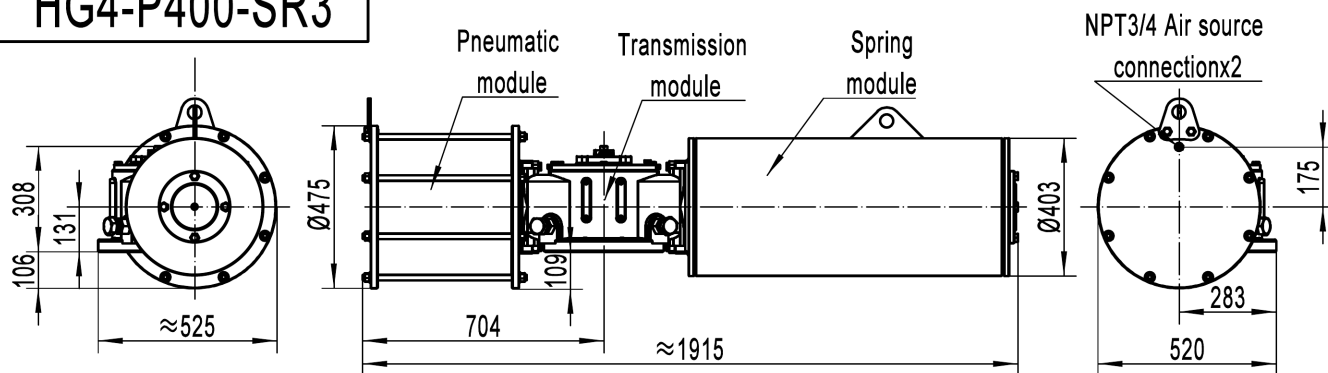


Accessory installation dimensions

-Updated date 260130


Connection size of bottom valve

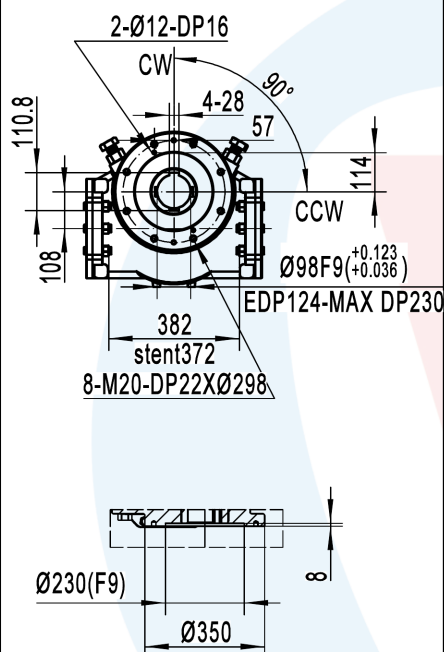

Top connection size

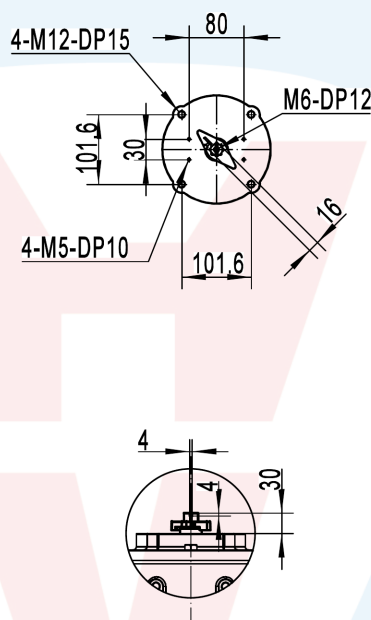

Side connection size

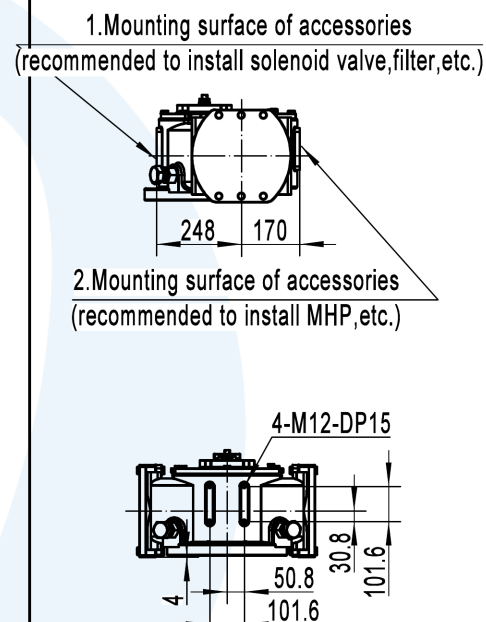

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG4-P400-SR3	Start	9468				5416	6604	7793	8981	11357
	45°	3987				1781	2422	3063	3704	4986
	End	5278				1226	2414	3603	4791	7167

Borrowing document	Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
					Inner side	Outer side	open	close	
Old base map number	HG4-P400-SR	8bar	0°-90° (±5°)	ST (-20 to +80) HT (-15 to +150) LT (-40 to +80)	21.5	---	4.0	5.0	558.2
Base map number									

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.

Sign	
Date	
Archivist	Date