

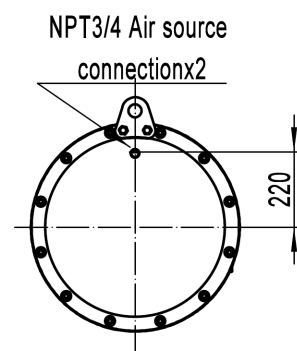
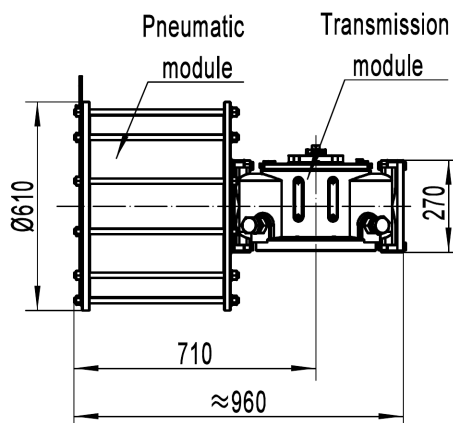


HG4-P500-DA




Accessory installation dimensions
-Updated date260130

Connection size of bottom valve

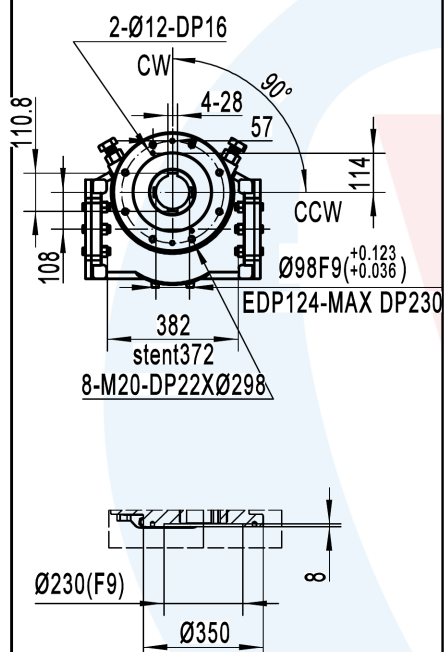


Top connection size

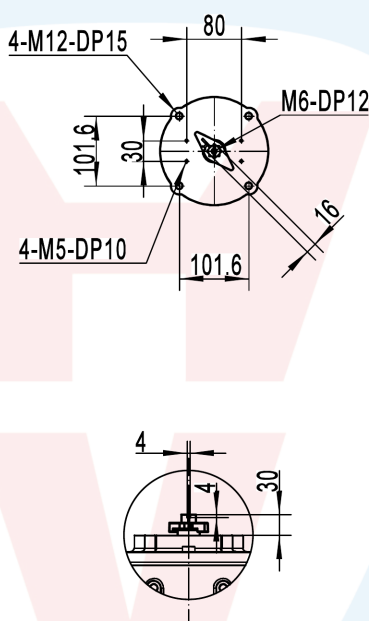


Side connection size

1.Mounting surface of accessories
(recommended to install solenoid valve,filter,etc.)



2.Mounting surface of accessories
(recommended to install MHP,etc.)



Output torque (Nm)

Type	position	Pressure (bar)								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
HG4-P500-DA	Start/End	11113	12965	14817	16669	18521	20373	22226	25930	29634
	45°	6009	7010	8012	9013	10015	11016	12018	14020	16023
Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)		
				Inner side	Outer side	open	close	each		
HG4-P500-DA	8bar	0°-90° (±5°)	ST (-20 to +80) HT (-15 to+150) LT (-40 to+80)	25.0	30.0	4.5	4.5	400.6		

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date