



HG4-P500-SR3

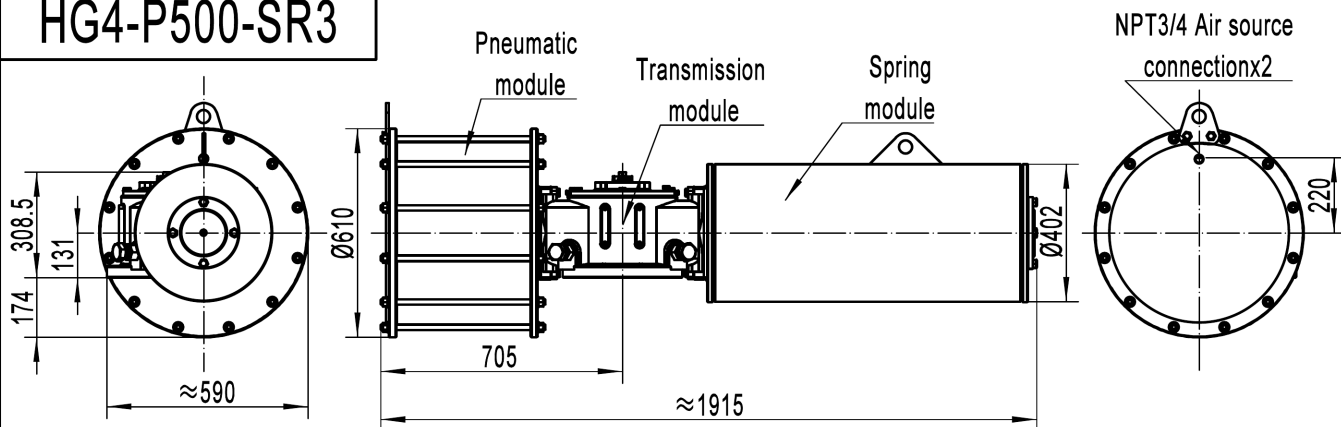


Accessory installation dimensions

-Updated date 260130


Connection size of bottom valve

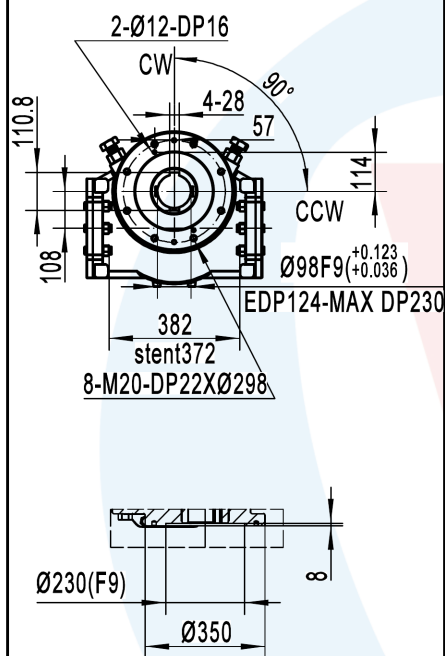

Top connection size

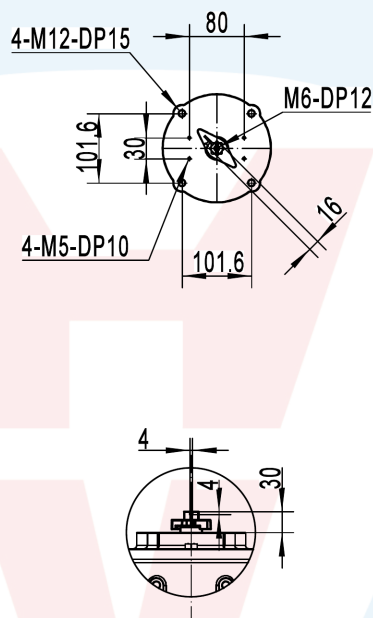

Side connection size

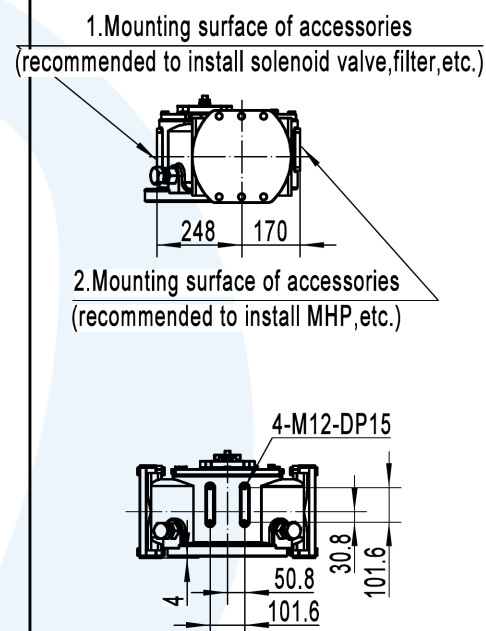

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG4-P500-SR3	Start	9468	5835	7687	9539	11391	13243	15095	16948	20652
	45°	3987	2022	3023	4025	5026	6028	7029	8031	10033
	End	5278	1645	3497	5349	7201	9053	10905	12758	16462

Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
				Inner side	Inner side	open	close	
HG4-P500-SR	8bar	0°-90° (±5°)	ST (-20 to +80) HT (-15 to +150) LT (-40 to +80)	25.0	---	4.5	5.5	662.9

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
3. The weights in the table do not include any attachments.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date