



HG5-P500-DA

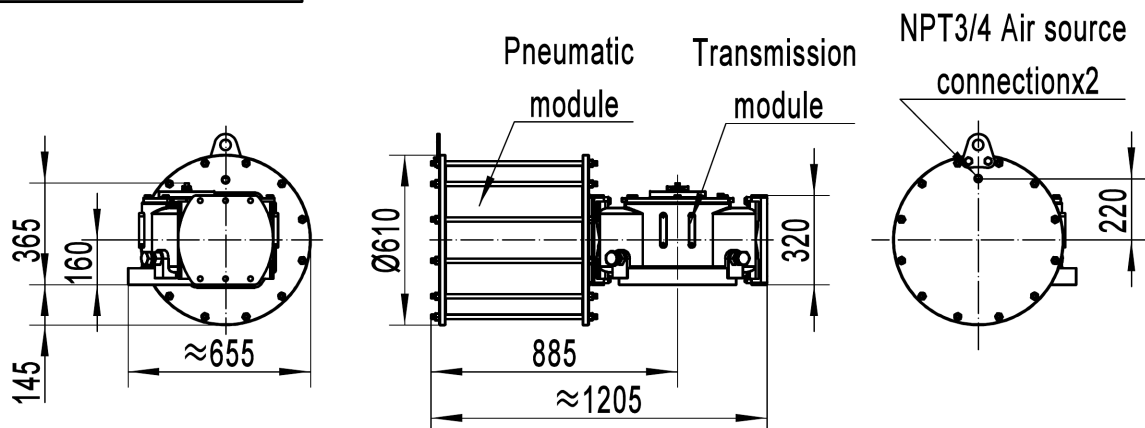


Accessory installation dimensions

-Updated date260130


Connection size of bottom valve

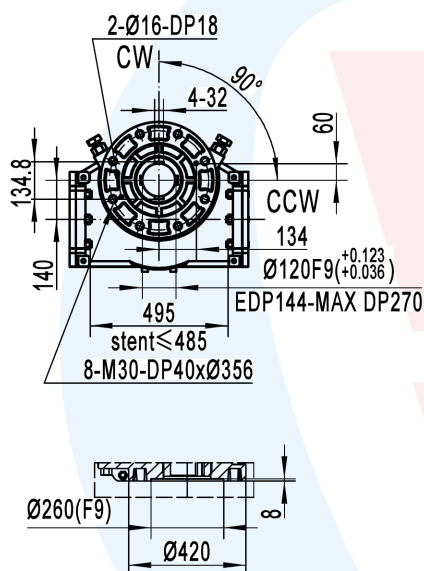

Top connection size

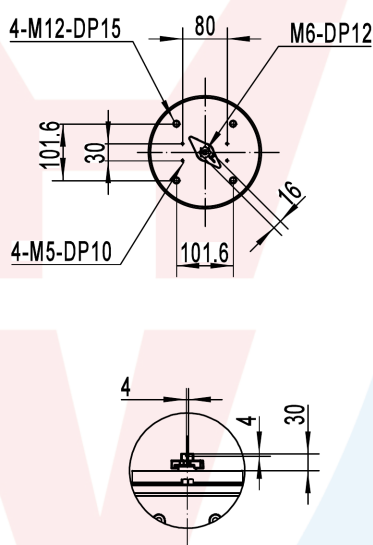

Side connection size

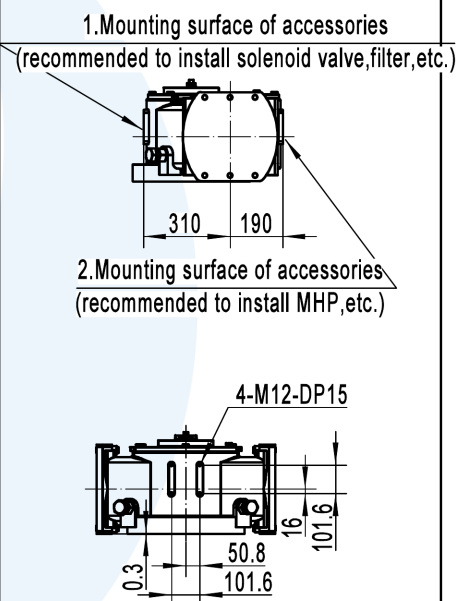

Output torque (Nm)

Type	position	Pressure (bar)								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
HG5-P500-DA	Start/End	14405	16806	19254	21661	24067	26474	28881	33694	38508
	45°	7789	9087	10386	11684	12982	14280	15578	18175	20771

Borrowing document	Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
					Inner side	Outer side	open	close	
Old base map number	HG5-P500-DA	8bar	0°-90° (±5°)	ST (-20 to +80)	69.5	77.0	7.0	7.0	560.9
Base map number				HT (-15 to +150) LT (-40 to +80)					

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
3. The weights in the table do not include any attachments.

Sign

Date

Archivist

Date