



HG5-P500-SR3

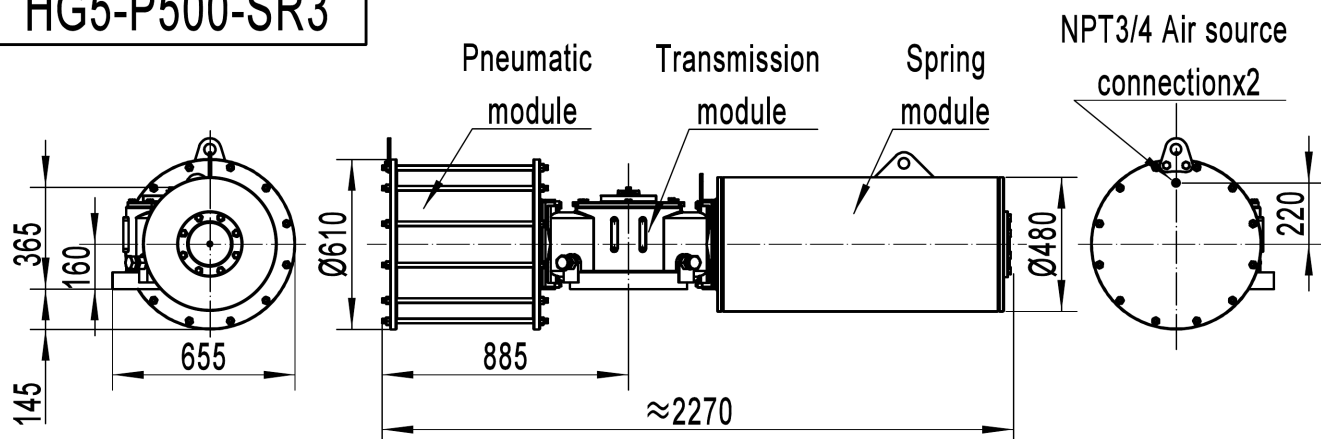


Accessory installation dimensions

-Updated date260130


Connection size of bottom valve

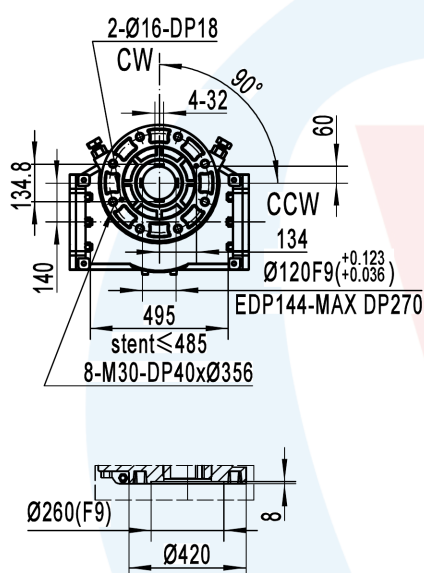

Top connection size

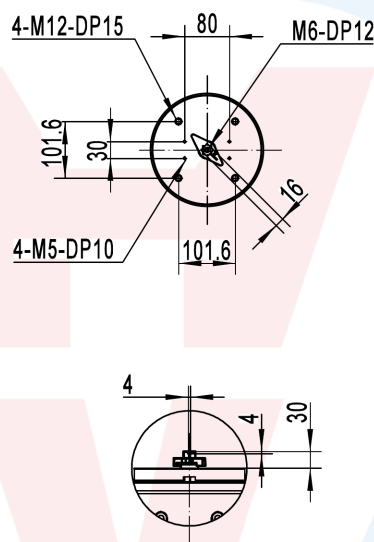

Side connection size

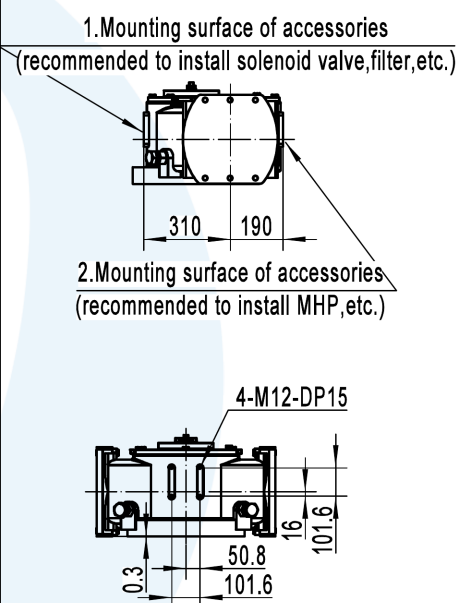

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG5-P500-SR3	Start	17171			9098	11505	13911	16318	18725	23538
	45°	7388			2998	4296	5594	6892	8190	10787
	End	10156			2083	4490	6896	9303	11710	16523

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date

Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
				Inner side	Outer side	open	close	
HG5-P500-SR	8bar	0°-90° (±5°)	ST (-20 to +80) HT (-15 to +150) LT (-40 to +80)	69.5	---	9.0	10.0	973.5

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.