

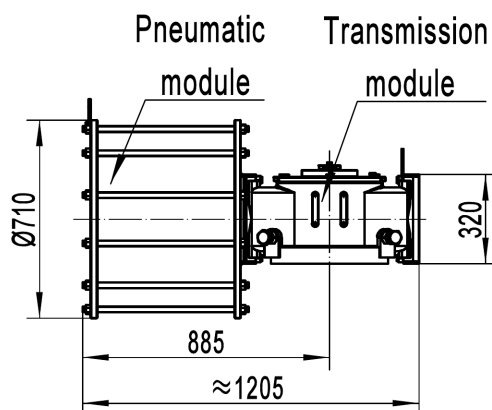



HG5-P600-DA




Accessory installation dimensions

-Updated date 260130


Connection size of bottom valve

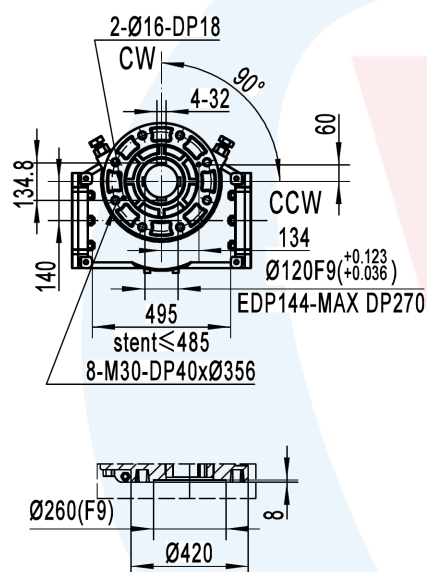

Top connection size

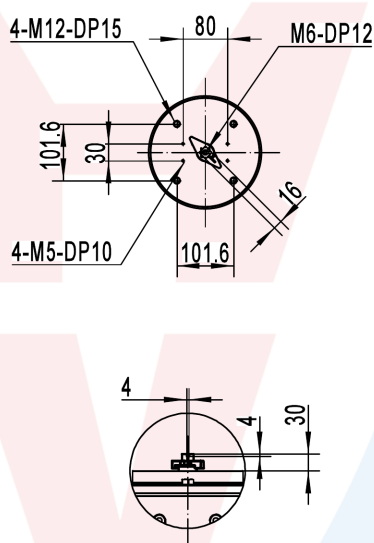

Side connection size

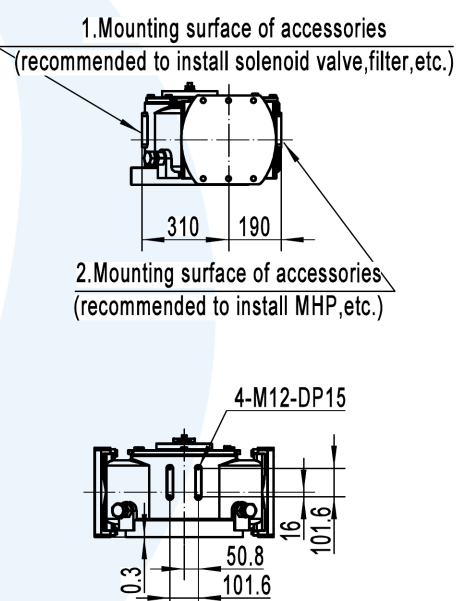

Output torque (Nm)

Type	position	Pressure (bar)								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
HG5-P600-DA	Start/End	20744	24201	27658	31116	34573	38030	41488	48402	55317
	45°	11216	13086	14955	16825	18694	20563	22433	26172	29910
Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)		
				Inner side	Outer side	open	close	each		
HG5-P600-DA	8bar	0°-90° (±5°)	ST (-20 to +80) HT (-15 to+150) LT (-40 to+80)	92.0	108.0	7.5	7.5	645.5		

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.

Sign

Date

Archivist Date