



HG5-P600-SR3

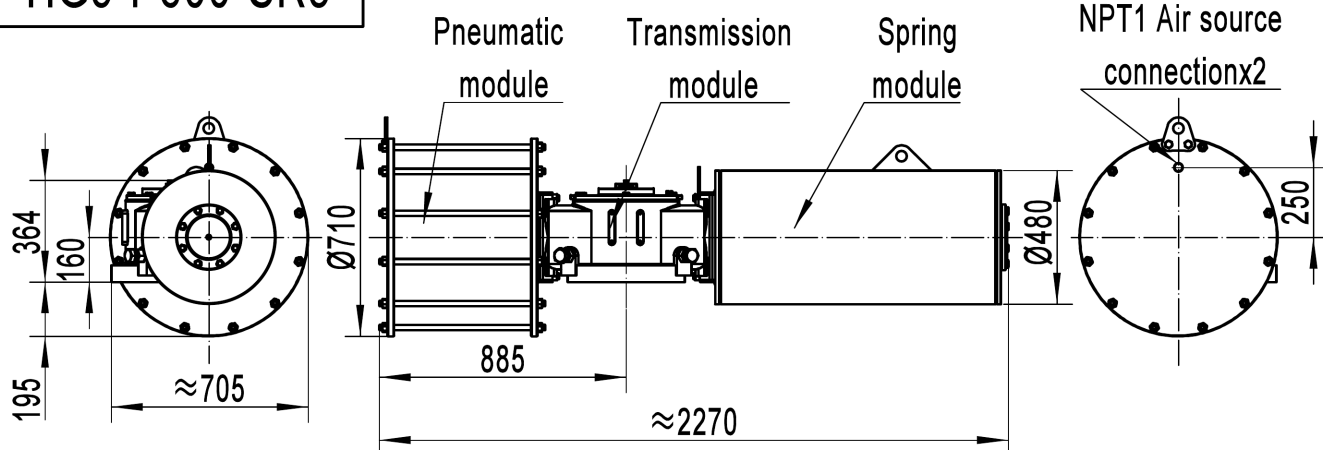


Accessory installation dimensions

-Updated date260130


Connection size of bottom valve

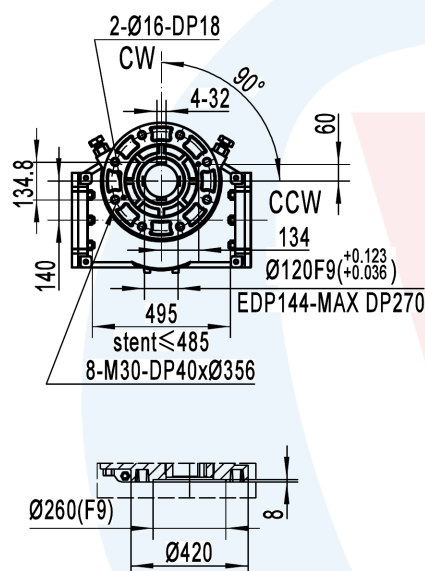

Top connection size

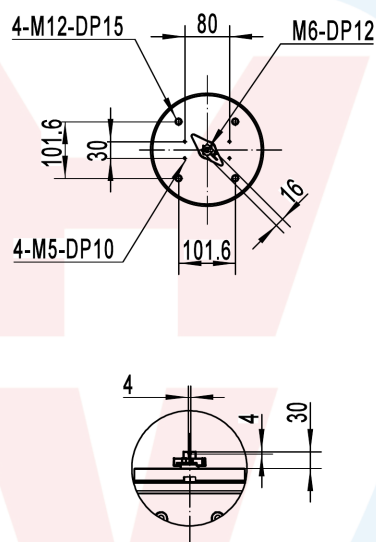

Side connection size

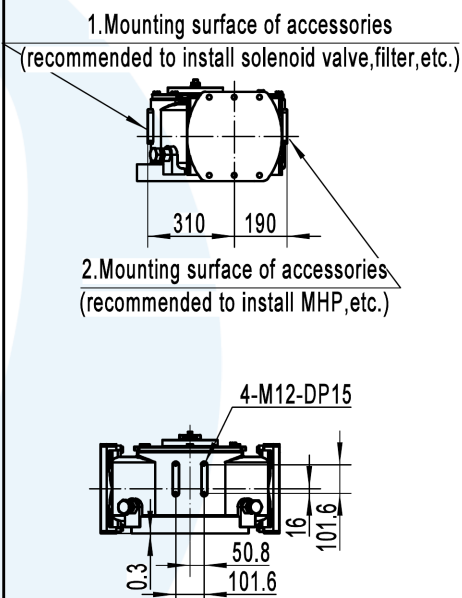

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG5-P600-SR3	Start	17171	10588	14045	17502	20960	24417	27874	31332	38246
	45°	7388	3828	5698	7567	9437	11306	13175	15045	18784
	End	10156	3573	7030	10487	13945	17402	20859	24317	31231
Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)		
				Inner side	Outer side	open	close			
HG5-P600-SR	8bar	0°-90° (±5°)	ST (-20 to +80) HT (-15 to+150) LT (-40 to+80)	92.0	---	9.0	10.0	1058.1		

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
3. The weights in the table do not include any attachments.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date