



HG5-P600-SR4

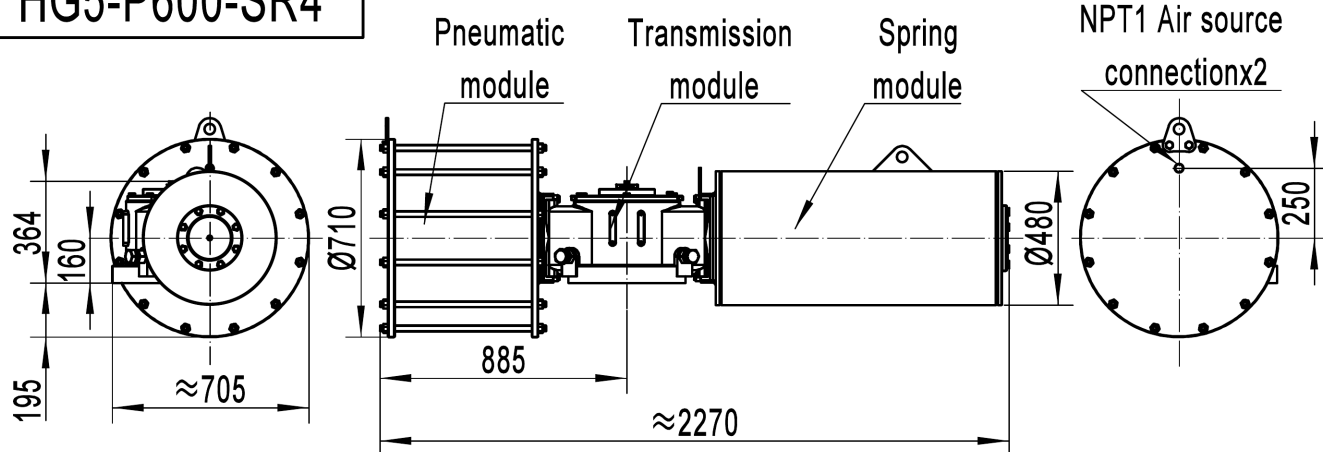


Accessory installation dimensions

-Updated date 260130


Connection size of bottom valve

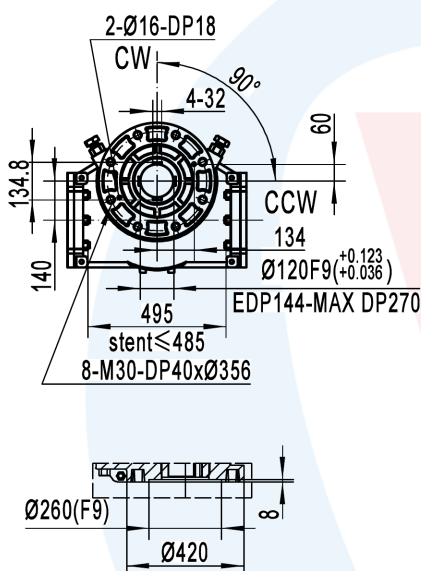

Top connection size

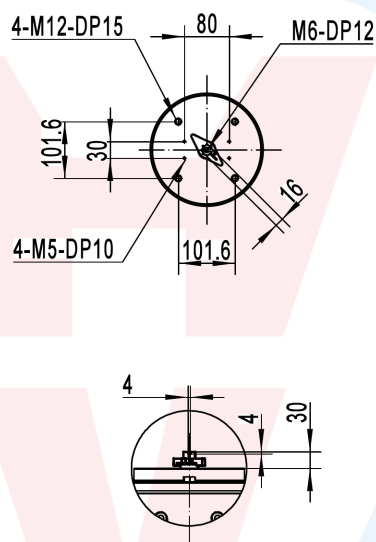

Side connection size

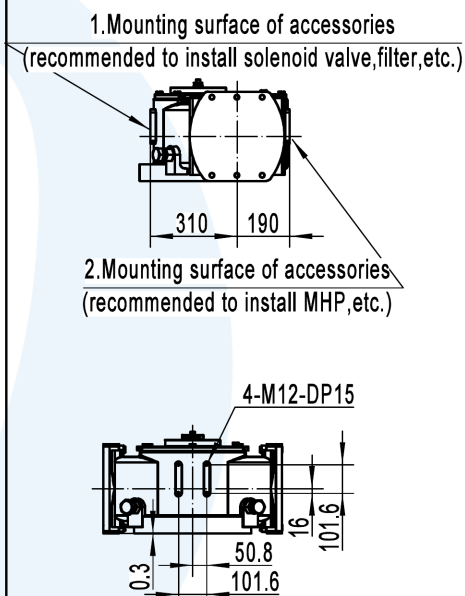

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG5-P600-SR4	Start	21000		11401	14858	18316	21773	25230	28688	35602
	45°	9400		3686	5555	7425	9294	11163	13033	16772
	End	12800		3201	6658	10116	13573	17030	20488	27402

Borrowing document	Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
					Inner side	Outer side	open	close	
Old base map number	HG5-P600-SR	8bar	0°-90° (±5°)	ST (-20 to +80)	92.0	---	9.0	10.0	1058.1
Base map number				HT (-15 to +150) LT (-40 to +80)					

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.

Sign

Date

Archivist

Date