
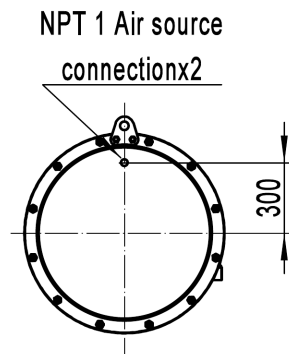
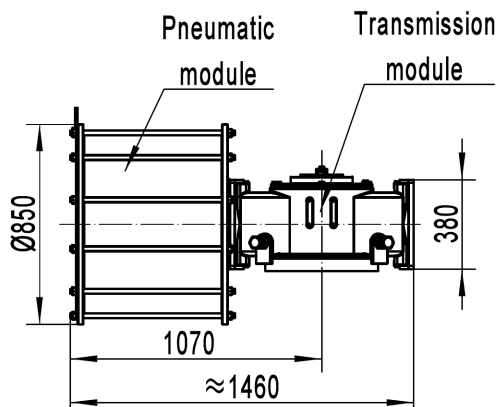



HG7-P720-DA

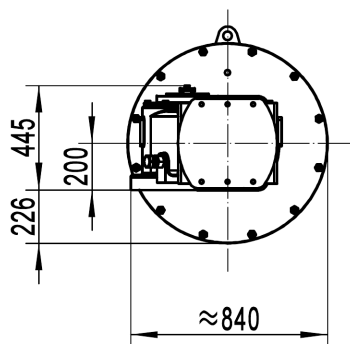


Accessory installation dimensions

-Updated date260130

Connection size of bottom valve


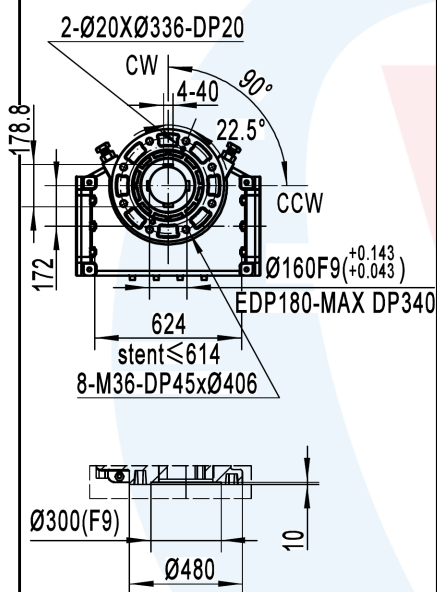


Top connection size

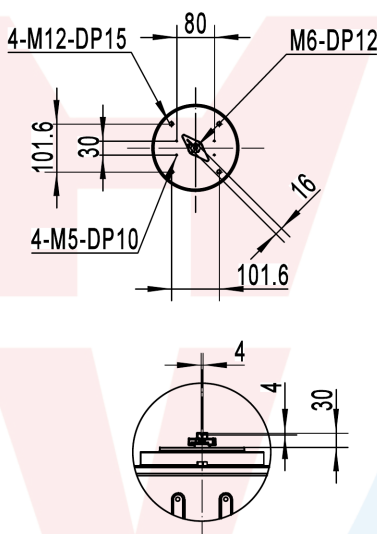

Side connection size

1.Mounting surface of accessories
(recommended to install solenoid valve,filter,etc.)

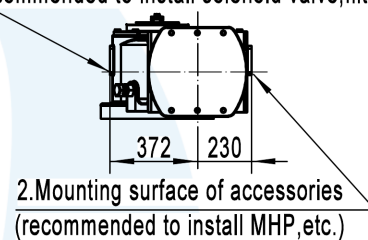

Output torque (Nm)

Type	position		Pressure (bar)								
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
HG7-P720 - DA	Start/End		36699	42815	48932	55048	61165	67281	73398	86531	97864
	45°		19843	23151	26458	29765	33072	36380	39687	46301	52916
Type	Maximum pressure		Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)		
					Inner side	Outer side	open	close	each		
HG7-P720-DA	8bar		0°-90° (±5°)	ST (-20 to +80) HT (-15 to+150) LT (-40 to+80)	150.0	187.0	9.0	10.0	1070.3		

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
3. The weights in the table do not include any attachments.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date