HG7-P720-SR3

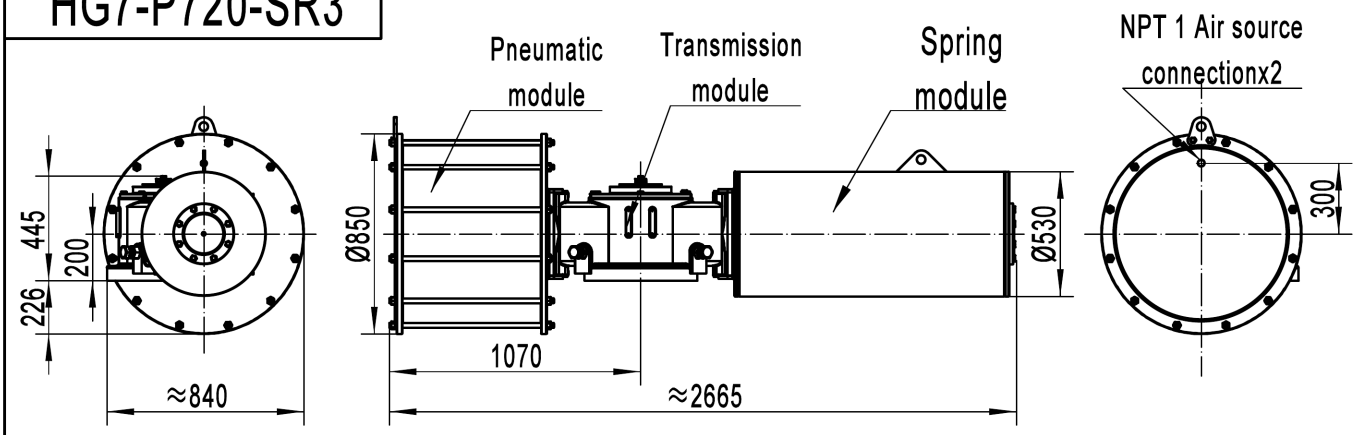

Accessory installation dimensions

-Updated date260130

Connection size of bottom valve

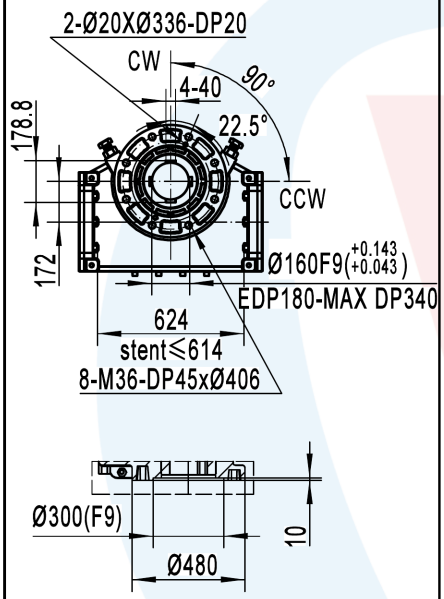

Top connection size

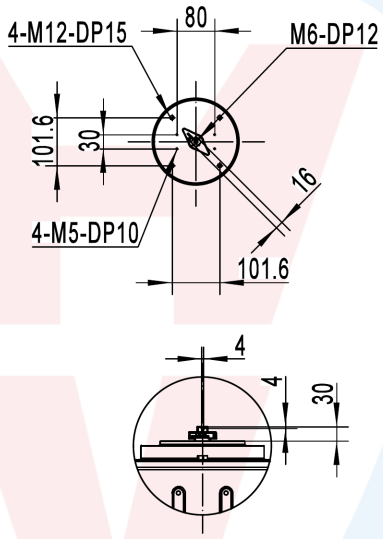

Side connection size

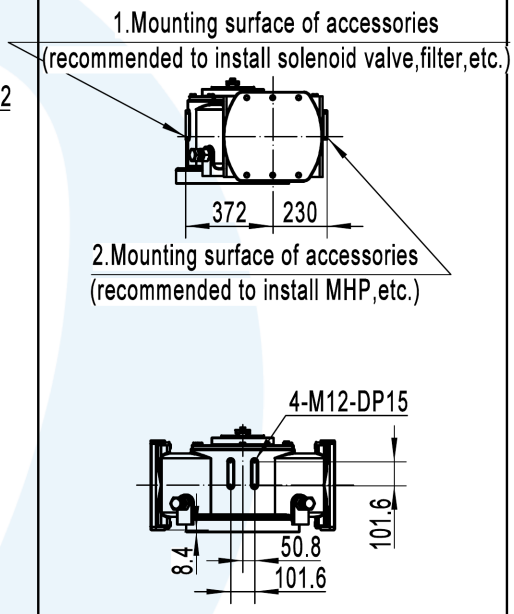

Output torque（Nm）

Type	position	Spring Torque Start	Pressure（bar）							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG7-P720-SR3	Start	31551	19192	25308	31425	37541	43658	49774	55891	68124
	45°	13263	6580	9888	13195	16502	19809	23117	26424	33038
	End	17507	5148	11264	17381	23497	29614	35730	41847	54080

Type	Maximum pressure	Rotation Angle	Temperature（°C）	Cylinder capacity（L）		Switch time（S）		Weight（kg）
				Inner side	Outer side	open	close	each
HG7-P720-SR	8bar	0°-90°（±5°）	ST（-20 to +80） HT（-15 to+150） LT（-40 to+80）	150.0	---	10.0	12.0	1624.2

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
3. The weights in the table do not include any attachments.

Borrowing document	
Old base map number	
Base map number	
Sign	
Date	
Archivist	Date