



HG7-P720-SR4

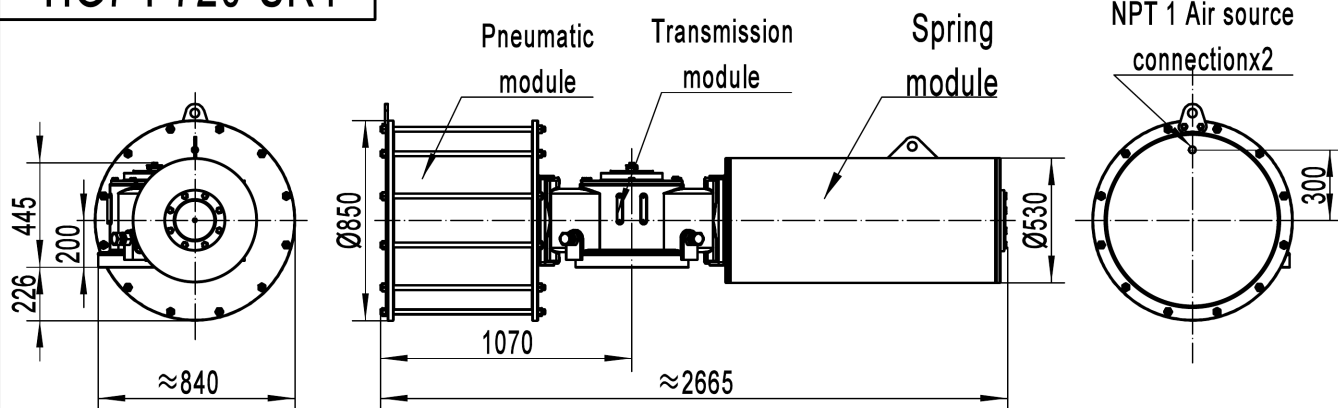


Accessory installation dimensions

-Updated date 260130

Connection size of bottom valve

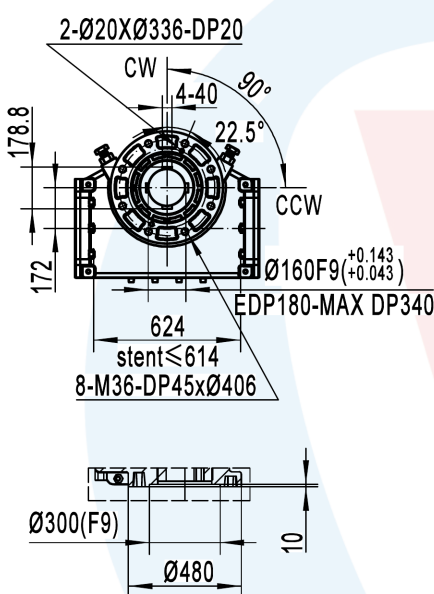


Top connection size

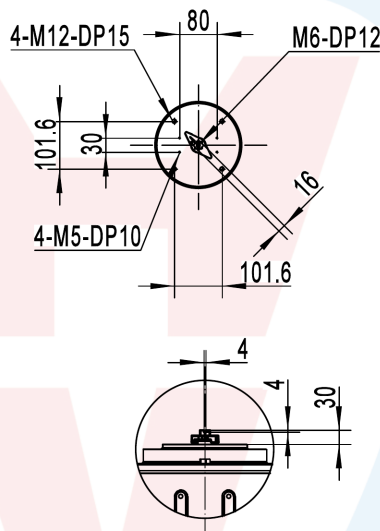


Side connection size

1. Mounting surface of accessories
(recommended to install solenoid valve, filter, etc.)



2. Mounting surface of accessories
(recommended to install MHP, etc.)



Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG7-P720-SR4	Start	38600		21115	27232	33348	39465	45581	51698	63931
	45°	16700		6451	9758	13065	16372	19680	22987	29601
	End	21700		4215	10332	16448	22565	28681	34798	47031
Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)		
				Inner side	Outer side	open	close			
HG7-P720-SR	8bar	0°-90° (±5°)	ST (-20 to +80) HT (-15 to+150) LT (-40 to+80)	150.0	---	10.0	12.0	1624.2		

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date