

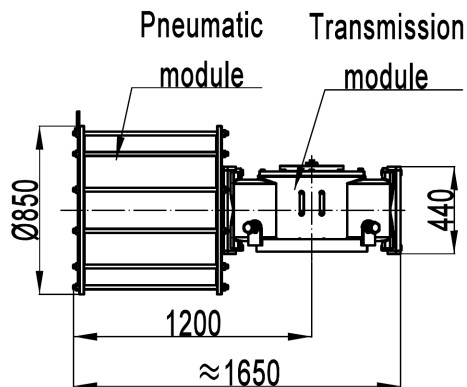



HG8-P720-DA




Accessory installation dimensions

-Updated date 260130

Connection size of bottom valve

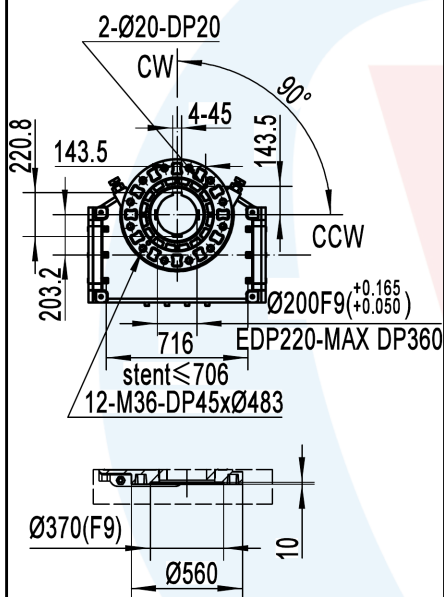


Top connection size

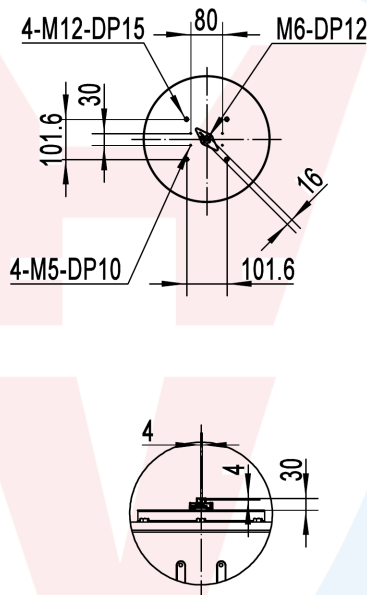


Side connection size

1. Mounting surface of accessories
(recommended to install solenoid valve, filter, etc.)



2. Mounting surface of accessories
(recommended to install MHP, etc.)



Output torque (Nm)

Type	position	Pressure (bar)								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
HG8-P720-DA	Start/End	43356	50582	57808	65034	72260	74986	86712	101164	115616
	45°	23443	27350	31257	35164	39072	42979	46886	54700	62514
Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)		
				Inner side	Outer side	open	close	each		
HG8-P720-DA	8bar	0°-90° (±5°)	ST (-20 to +80) HT (-15 to+150) LT (-40 to+80)	207.0	214.5	10.6	11.6	1284.7		

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.

Sign

Date

Archivist Date