



HG8-P780-SR4

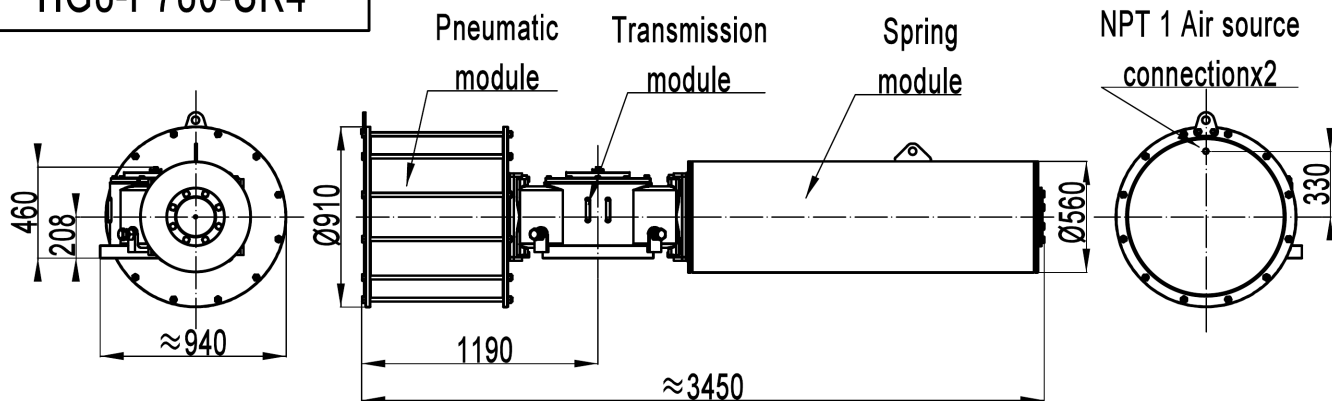


Accessory installation dimensions

-Updated date 260130


Connection size of bottom valve

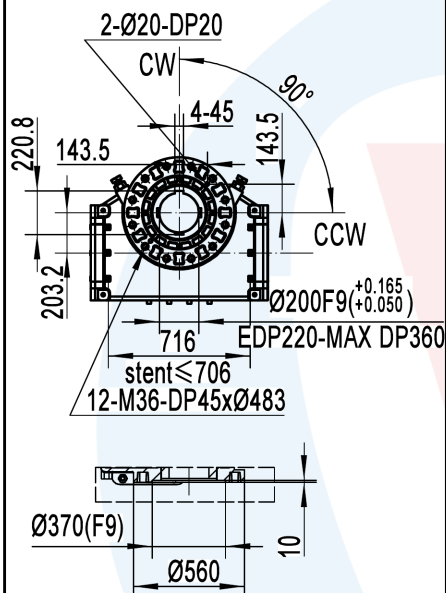

Top connection size

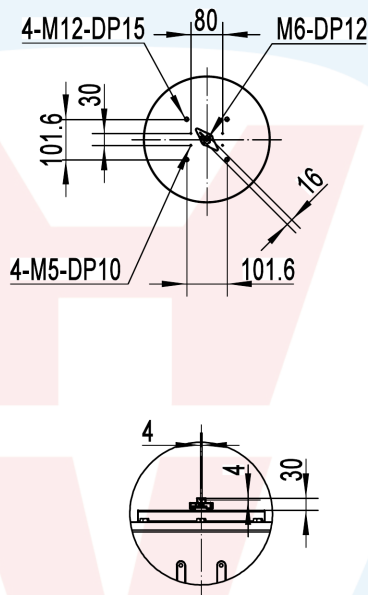

Side connection size

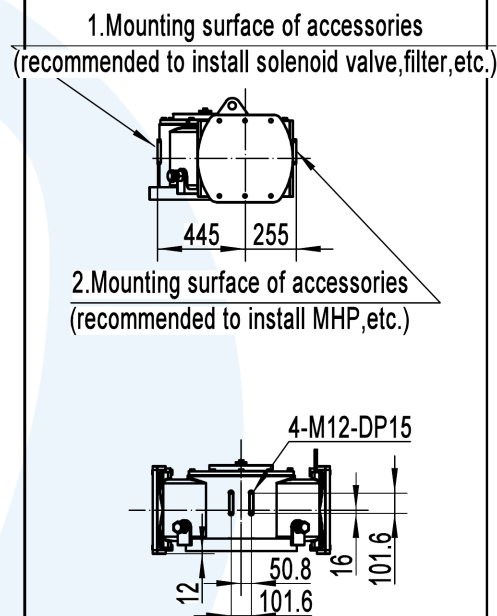

Output torque (Nm)

Type	position	Spring Torque Start	Pressure (bar)							
			3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0
HG8-P780-SR4	Start	53738		28417	36898	45378	53859	62339	70820	87781
	45°	22895		9203	13789	18374	22960	27545	32131	41302
	End	30946		5625	14106	22586	31067	39547	48028	64989

Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)
				Inner side	Outer side	open	close	
HG8-P780-SR	8bar	0°-90° (±5°)	ST (-20 to +80) HT (-15 to +150) LT (-40 to +80)	239.0	---	12.0	16.0	2332.2

Note:

1. The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
2. The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
3. The weights in the table do not include any attachments.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date