



HG8-P980-DA

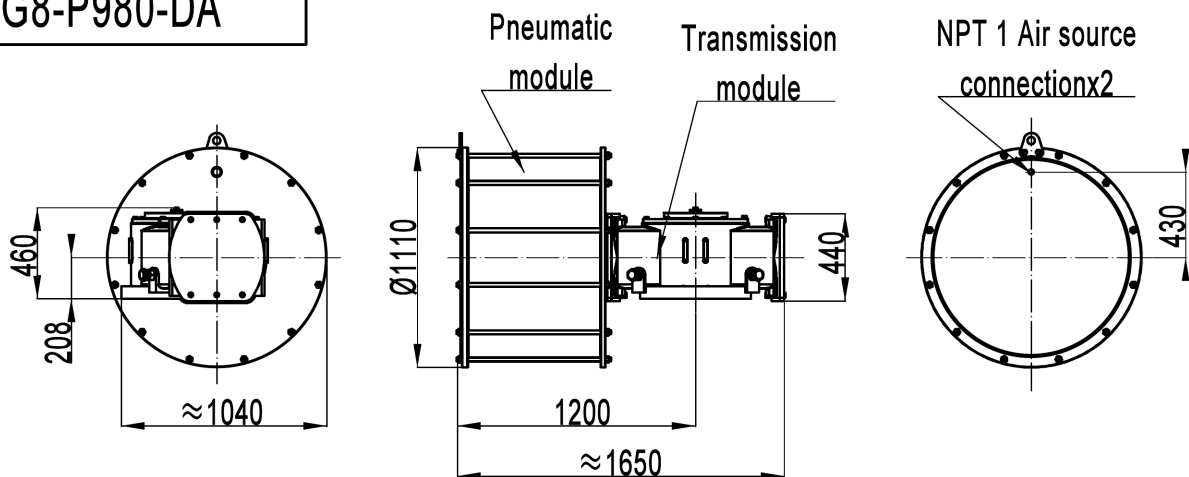


Accessory installation dimensions

-Updated date 260130


Connection size of bottom valve

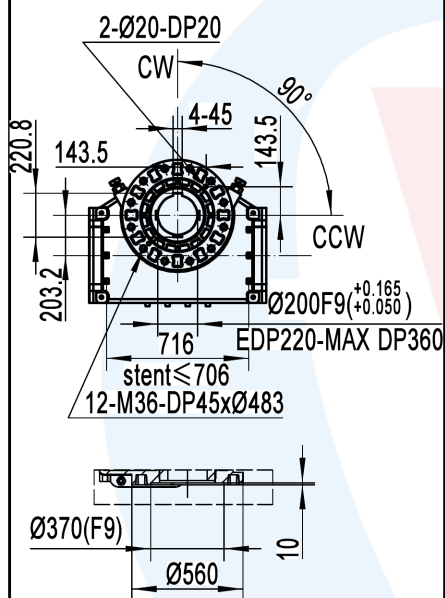

Top connection size

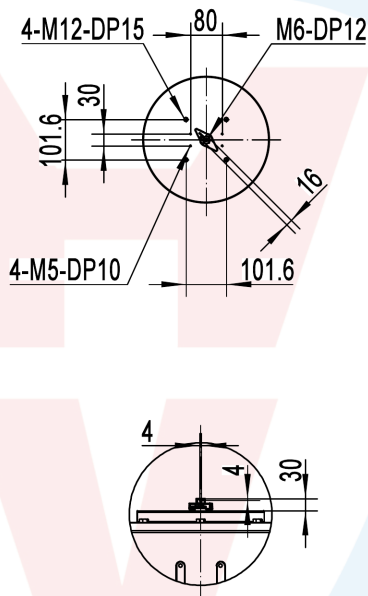

Side connection size

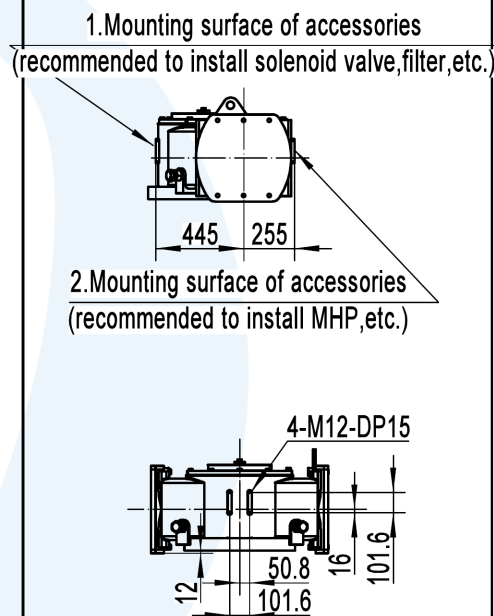

Output torque (Nm)

Type	position	Pressure (bar)								
		3.0	3.5	4.0	4.5	5.0	5.5	6.0	7.0	8.0
HG8-P980-DA	Start/End	80322	93709	107096	120483	133870	147257	160644	187418	214192
	45°	43431	50669	57908	65146	72385	79623	86862	101339	115816
Type	Maximum pressure	Rotation Angle	Temperature (°C)	Cylinder capacity (L)		Switch time (S)		Weight (kg)		
				Inner side	Outer side	open	close	each		
HG8-P980-DA	8bar	0°-90° (±5°)	ST (-20 to +80) HT (-15 to+150) LT (-40 to+80)	340.0	370.0	20.0	21.0	1610.5		

Note:

- The cylinder module and spring module in the model table are standard configurations. If the configuration is changed, the data will also change accordingly. You can consult the company's technical department.
- The action time was measured under the following conditions: (1) room temperature, (2) angular travel of 90°, (3) clean gas, (4) pipe length of 2-3 meters, (5) gas source pressure of 5.0bar, and (6) the actuator is not carrying any load.
- The weights in the table do not include any attachments.

Borrowing document

Old base map number

Base map number

Sign

Date

Archivist

Date